

Geological Character and Mineral Resources of South Central Lake Erie

by

S. Jeffress Williams and Edward P. Meisburger

MISCELLANEOUS REPORT NO. 82-9

OCTOBER 1982



Approved for public release;
distribution unlimited.

U.S. ARMY, CORPS OF ENGINEERS
COASTAL ENGINEERING
RESEARCH CENTER

Kingman Building
Fort Belvoir, Va. 22060

Reprint or republication of any of this material shall give appropriate credit to the U.S. Army Coastal Engineering Research Center.

Limited free distribution within the United States of single copies of this publication has been made by this Center. Additional copies are available from:

*National Technical Information Service
ATTN: Operations Division
5285 Port Royal Road
Springfield, Virginia 22161*

Contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products.

The findings in this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER MR 82-9	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) GEOLOGICAL CHARACTER AND MINERAL RESOURCES OF SOUTH CENTRAL LAKE ERIE		5. TYPE OF REPORT & PERIOD COVERED Miscellaneous Report
		6. PERFORMING ORG. REPORT NUMBER
7. AUTHOR(s) S. Jaffress Williams Edward P. Meisburger		8. CONTRACT OR GRANT NUMBER(s)
9. PERFORMING ORGANIZATION NAME AND ADDRESS Department of the Army Coastal Engineering Research Center (CEREN-GE) Kingman Building, Fort Belvoir, Virginia 22060		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS C31665
11. CONTROLLING OFFICE NAME AND ADDRESS Department of the Army Coastal Engineering Research Center Kingman Building, Fort Belvoir, Virginia 22060		12. REPORT DATE October 1982
		13. NUMBER OF PAGES 62
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Beach nourishment Lake Erie Presque Isle		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) During the summers of 1977 and 1978, a 900-square kilometer region of southern Lake Erie, between the Ohio-Pennsylvania border and Erie, Pennsylvania, was surveyed, using high resolution seismic reflection equipment and long vibracores, to determine the shallow subbottom geologic character of the lake floor. Emphasis was placed on describing the sediments and identifying deposits of sand and gravel that might be dredged and used as fill for beach (continued)		

nourishment projects on Presque Isle Peninsula. A total of 416 kilometers of seismic profiles and 49 cores with an average length of 4.1 meters were analyzed along with 23 grab samples.

Analyses of the seismic profiles, sediment cores, and grab samples show that four major geologic units are present. Paleozoic shale bedrock with a lakeward slope underlies the entire region. Shale crops out at the lake floor shoreward of the -10-meter contour and attains depths of -87 meters about 18 kilometers offshore. Thick units of glacial sediment overlie the bedrock surface and include assorted tills, stratified glaciofluvial sand and gravel, and stiff lacustrine muds. Beach and dune sands are present on the top of the transverse ridge between Long Point, Ontario, and Presque Isle. These sands result from the reworking of the morainal sediments comprising the ridge by coastal processes of an earlier Lake Erie. Modern soft muds are accumulating in deepwater, low-energy areas adjacent to the ridge and Presque Isle platform.

Sand and gravel of suitable size distribution and composition are present in large quantities in two locales. The ridge and platform features contain about 39 million cubic meters of proven resources within 2.3 meters of the lake floor; the seismic profiles of the subbottom show that two to three times that volume may be present if the entire ridge is considered. A second morainal ridge off Dans Beach, west of Erie, is judged to contain several million cubic meters, but its closeness to shore and the distance of 25 kilometers from Erie limit the fill potential of the ridge.

PREFACE

This report provides data and information on the geomorphology, geologic character, and sediment distribution on a part of Lake Erie with specific emphasis on locating, describing, and delineating offshore sand deposits having potential for use as fill material for beach nourishment projects on Presque Isle Peninsula. Seismic reflection data and sediment cores comprise the data base for this study which will contribute to the Beach Erosion Control Study of Presque Isle Peninsula, Erie, Pennsylvania, being conducted by the U.S. Army Engineer District, Buffalo. The work was carried out under the U.S. Army Coastal Engineering Research Center's (CERC) Barrier Island Sedimentation Studies work unit, Shore Protection and Restoration Program, Coastal Engineering Area of Civil Works Research and Development.

The report was prepared principally by S. Jeffress Williams, Geologist, with the assistance of Edward P. Meisburger, Geologist, in all phases of the study, under the general supervision of Dr. C.H. Everts, Chief, Engineering Geology Branch, and Mr. N. Parker, Chief, Engineering Development Division, CERC.


The authors acknowledge the assistance of the following people: D.A. Prins for collecting and reducing the data, J. Pope and D. Clark (Buffalo District) for their support and interest in conducting the study, Professor P. Knuth (Edinboro State College) for providing unpublished data and sediment samples from his own studies and several of his students for their help in collecting the survey data.

Original copies of the seismic profiles, as well as the cores, are stored at CERC. Requests for information relative to these data should be directed to S.J. Williams at CERC.

Technical Director of CERC was Dr. Robert W. Whalin, P.E., upon publication of this report.

Comments on this publication are invited.

Approved for publication in accordance with Public Law 166, 79th Congress, approved 31 July 1945, as supplemented by Public Law 172, 88th Congress, approved 7 November 1963.



TED E. BISHOP
Colonel, Corps of Engineers
Commander and Director

CONTENTS

	Page
CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI)	6
I INTRODUCTION	7
1 Scope of Survey	8
2 Geographic Setting and Lake Floor Topography	8
3 Data Analysis	11
II RESULTS	15
1 Primary Geologic Units	15
2 Potential Sand and Gravel Deposits	19
LITERATURE CITED	28
 APPENDIX	
A CORE SEDIMENT DESCRIPTIONS	29
B SEDIMENT GRAIN-SIZE DATA	35
C RSA SIZE ANALYSIS	41
 TABLES	
1 Grain-size scales-soil classification	14
2 Summary of wood fragments present in eight cores and radiocarbon-14 age date results	21
 FIGURES	
1 Location map of the study area	9
2 Data coverage of seismic profiles and vibratory cores	10
3 Bathymetric map of the study area	12
4 Map of the central Lake Erie basin showing the transverse ridge that connects with Long Point and projects toward Presque Isle . . .	13
5 Shore-normal profiles of Presque Isle	15
6 Map of the shale bedrock surface	16
7 Locations of the interpreted seismic profiles	17
8 Profiles A and B off Presque Isle	18
9 Profiles G and H west of Presque Isle	18
10 Extent of probable moraine segments in the study area based on the seismic and core data	20
11 Cores containing wood fragments	21

CONTENTS

FIGURES--Continued

	Page
12 Map of potential borrow areas for sand and gravel	23
13 Profiles C and D.	24
14 Profiles E and F.	24
15 Profiles I and J.	25
16 Profiles K and L.	25
17 Profile M	26
18 Profiles N and O.	26

CONVERSION FACTORS, U.S. CUSTOMARY TO METRIC (SI) UNITS OF MEASUREMENT

U.S. customary units of measurement used in this report can be converted to metric (SI) units as follows:

Multiply	by	To obtain
inches	25.4	millimeters
	2.54	centimeters
square inches	6.452	square centimeters
cubic inches	16.39	cubic centimeters
feet	30.48	centimeters
	0.3048	meters
square feet	0.0929	square meters
cubic feet	0.0283	cubic meters
yards	0.9144	meters
square yards	0.836	square meters
cubic yards	0.7646	cubic meters
miles	1.6093	kilometers
square miles	259.0	hectares
knots	1.852	kilometers per hour
acres	0.4047	hectares
foot-pounds	1.3558	newton meters
millibars	1.0197×10^{-3}	kilograms per square centimeter
ounces	28.35	grams
pounds	453.6	grams
	0.4536	kilograms
ton, long	1.0160	metric tons
ton, short	0.9072	metric tons
degrees (angle)	0.01745	radians
Fahrenheit degrees	5/9	Celsius degrees or Kelvins ¹

¹To obtain Celsius (C) temperature readings from Fahrenheit (F) readings, use formula: $C = (5/9) (F - 32)$.

To obtain Kelvin (K) readings, use formula: $K = (5/9) (F - 32) + 273.15$.

GEOLOGICAL CHARACTER AND MINERAL RESOURCES
OF SOUTH CENTRAL LAKE ERIE

by
S. Jeffress Williams and Edward P. Meisburger

I. INTRODUCTION

Presque Isle Peninsula is a classic example of a compound recurved sand-spit, which extends 4 kilometers into Lake Erie and about 10 kilometers along the Pennsylvania shoreline. Because of its position and morphology, Presque Isle acts as a natural offshore breakwater for Erie Harbor, blocking the prevailing winds and waves from southwest to northwest. However, Presque Isle has experienced severe erosion on the straight "neck" segment, because of its exposed position, while the eastern distal end has undergone continual growth in length and width. Presque Isle is important not only to the service of Erie Harbor, but also as a recreation resource to 3 to 4 million annual visitors. Because of this value several engineering plans have been implemented during the past 40 years in an attempt to diminish erosion and maintain the integrity and position of Presque Isle.

Presque Isle was first surveyed by Army engineers in 1819 because of erosion problems, and it became a federally authorized beach erosion project in 1824. Historically, severe erosion has always plagued the narrow neck part of Presque Isle. On at least four occasions waves have breached the neck and created inlets that separated the peninsula from the mainland; each time, however, the inlets have been closed either by natural processes or by Federal and State action. Serious interest in maintaining Presque Isle for recreation purposes and the protection of Erie Harbor began to grow in the late 1940's.

The first comprehensive coastal engineering plan, which began in 1956, consisted of constructing a system of groins combined with sandfill for beach nourishment along the western side of the peninsula mainland out about two-thirds the length of the peninsula. The sandfill was derived from borrow pits within Erie Harbor and was considered suitable but the mean grain was smaller than the native beach material. Because of this the sand was very unstable in the normal littoral environment, causing subsequent erosion and the rapid removal of the nourished shore. There have been numerous emergency fills and all but one, which was done in 1965, failed to maintain the desired beach width and height because the fine sand placed was highly susceptible to erosion. The 1965 nourishment plan included an experimental phase that placed coarse sand with a mean size of about 0.4 phi (0.75 millimeter), in comparison to native grain size of 2.1 phi (0.23 millimeter), on a 350-meter-long stretch of shore between groins No. 2 and 3 where the greatest erosion occurred (Berg and Duane, 1968). This fill was unique in that it was derived from a State-leased area about 13 kilometers offshore from the project. Sampling and profiling of the groin compartment following the coarse sandfill operation indicated that the shore experienced little loss of sand and maintained a stable profile. Berg and Duane's (1968) findings proved that the use of fill with a coarser size distribution than the native sand, but including all the native profile sizes, can be an effective means of both stabilizing the shore and providing a recreational resource.

The 1974 Water Resources Act provided funding over a 5-year period to plan and conduct new studies to stabilize the Presque Isle shore. The plan being studied by the U.S. Army Engineer District, Buffalo, may include the construction of five segmented offshore breakwaters and the placement of 1.3 million cubic meters of suitable coarse sandfill, along with annual nourishment requirements of about 137 000 cubic meters (U.S. Army Engineer District, Buffalo, 1979). Over a 50-year project life the requirement for sandfill would be about 8.1 million cubic meters.

This report discusses a survey that was conducted in 1977 and 1978, covering about 900 square kilometers of the Pennsylvania region of Lake Erie, by means of high resolution seismic reflection profiles and vibratory cores with the objective of providing detailed information on the character and quantities of submerged sand and gravel deposits. This data base will provide a significant contribution to the Beach Erosion Control Study of Presque Isle Peninsula currently being conducted by the Buffalo District.

1. Scope of Survey.

The study area covered about 900 square kilometers of Lake Erie, from the Ohio-Pennsylvania border east 45 kilometers to the city of Erie, Pennsylvania, with particular emphasis on the offshore areas of the Presque Isle Peninsula (Fig. 1). The area of data collection extended from the shore lakeward generally about 8 kilometers, excluding the area northwest of Presque Isle that contains an elongate submerged ridge extending to Long Point on the Canadian side. Data coverage over the ridge area extends a maximum of 32 kilometers from the shore to the Canadian border. Water depths in the areas surveyed ranged from about -5 to -23 meters. A total of 416 kilometers of high resolution continuous seismic reflection profiles and 49 cores were collected (Fig. 2). Core lengths ranged from 1.3 to 6.1 meters and averaged 4.1 meters. Throughout both the seismic and coring surveys a Motorola Mini-Ranger III electronic positioning system was used to accurately record the positions of the survey vessels. The stated accuracy of this system is ± 3 meters. These basic data were supplemented by pertinent scientific and technical literature and available National Ocean Survey (NOS) charts.

The seismic and coring data were collected during summer surveys in 1977 and 1978, as part of the Coastal Field Data Collection Program conducted by the Coastal Engineering Research Center (CERC). Additional funding and administrative support needed for a detail study of the offshore ridge was provided by the U.S. Army Engineer District, Buffalo. The present study is part of a larger investigation by CERC covering the south shore of Lake Erie from Erie to Toledo, Ohio. The Ohio part of the study was done in cooperation with the Ohio Department of Natural Resources Division of Geological Survey and results from those surveys are presented in two other reports, Williams, et al. (1980) and Carter, et al. (in preparation, 1982).

2. Geographic Setting and Lake Floor Topography.

The study area is situated near the southern boundary of the eastern lake section that is part of the Central Lowland Physiographic Province. This entire region has been subjected to multiple episodes of continental glaciation during the past several million years and much of the land topography and drainage has been determined by the glacial events of erosion and deposition. The

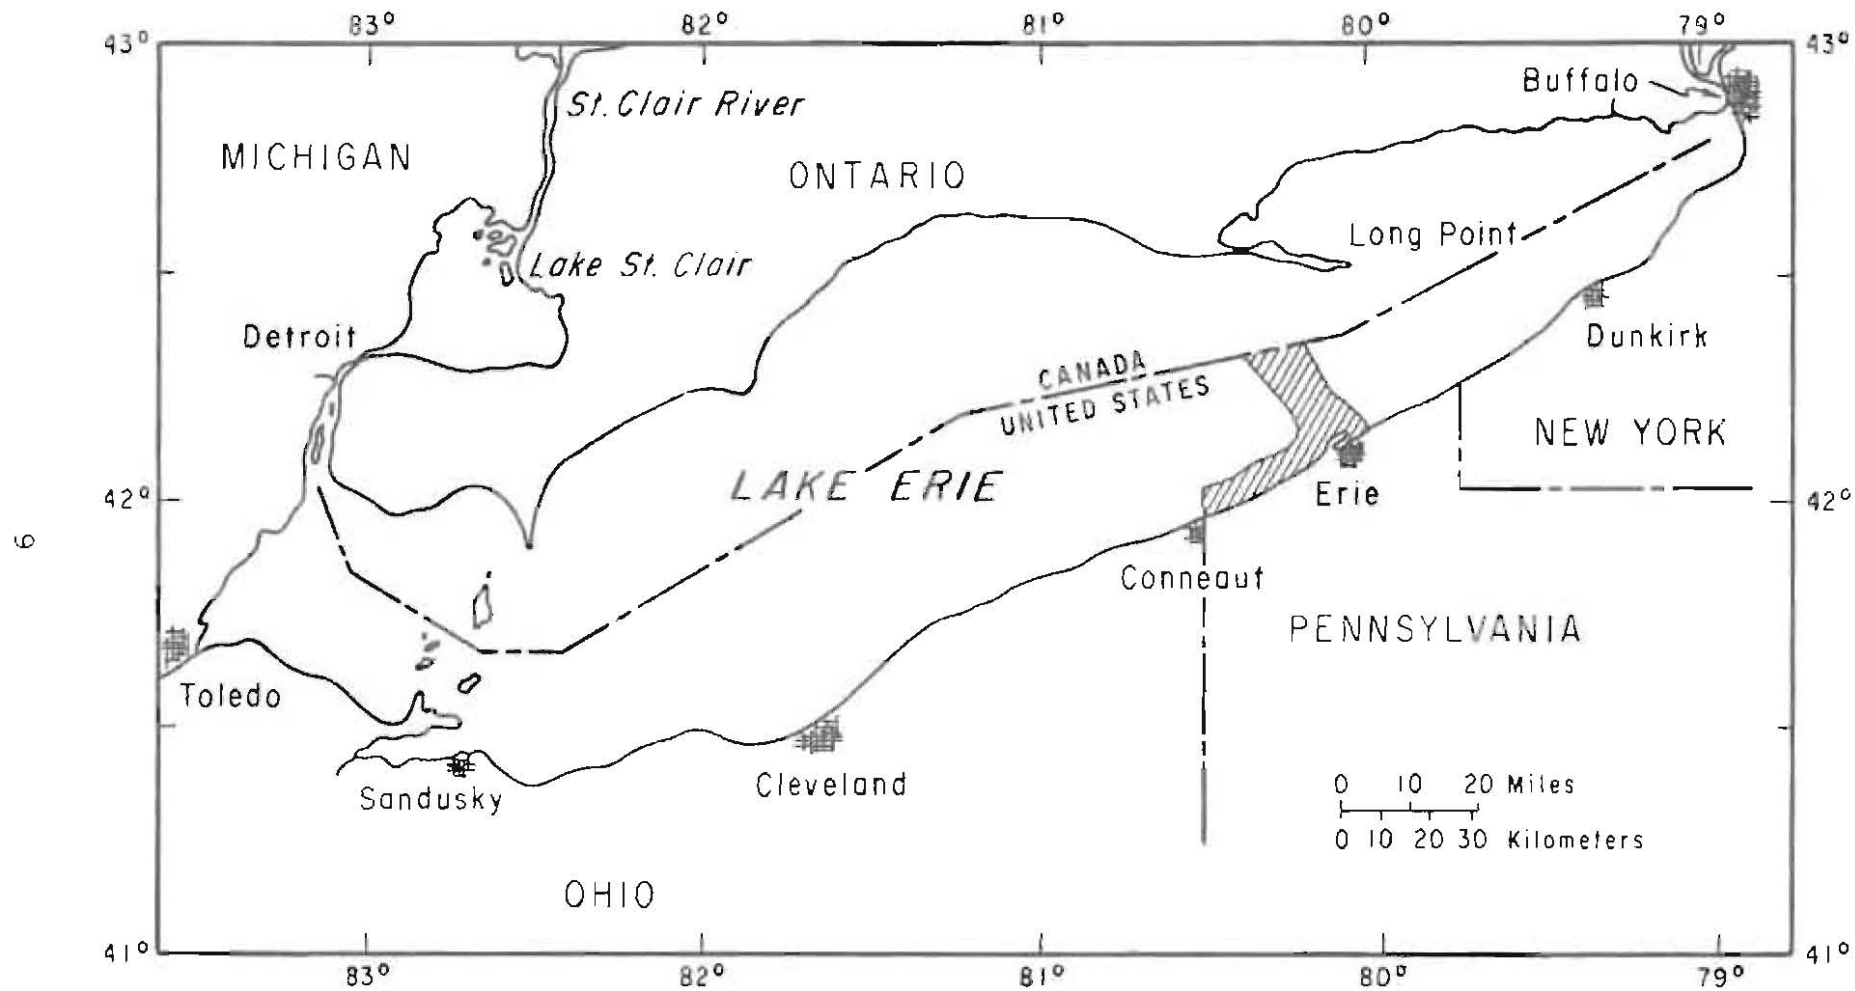


Figure 1. Location map of the study area.

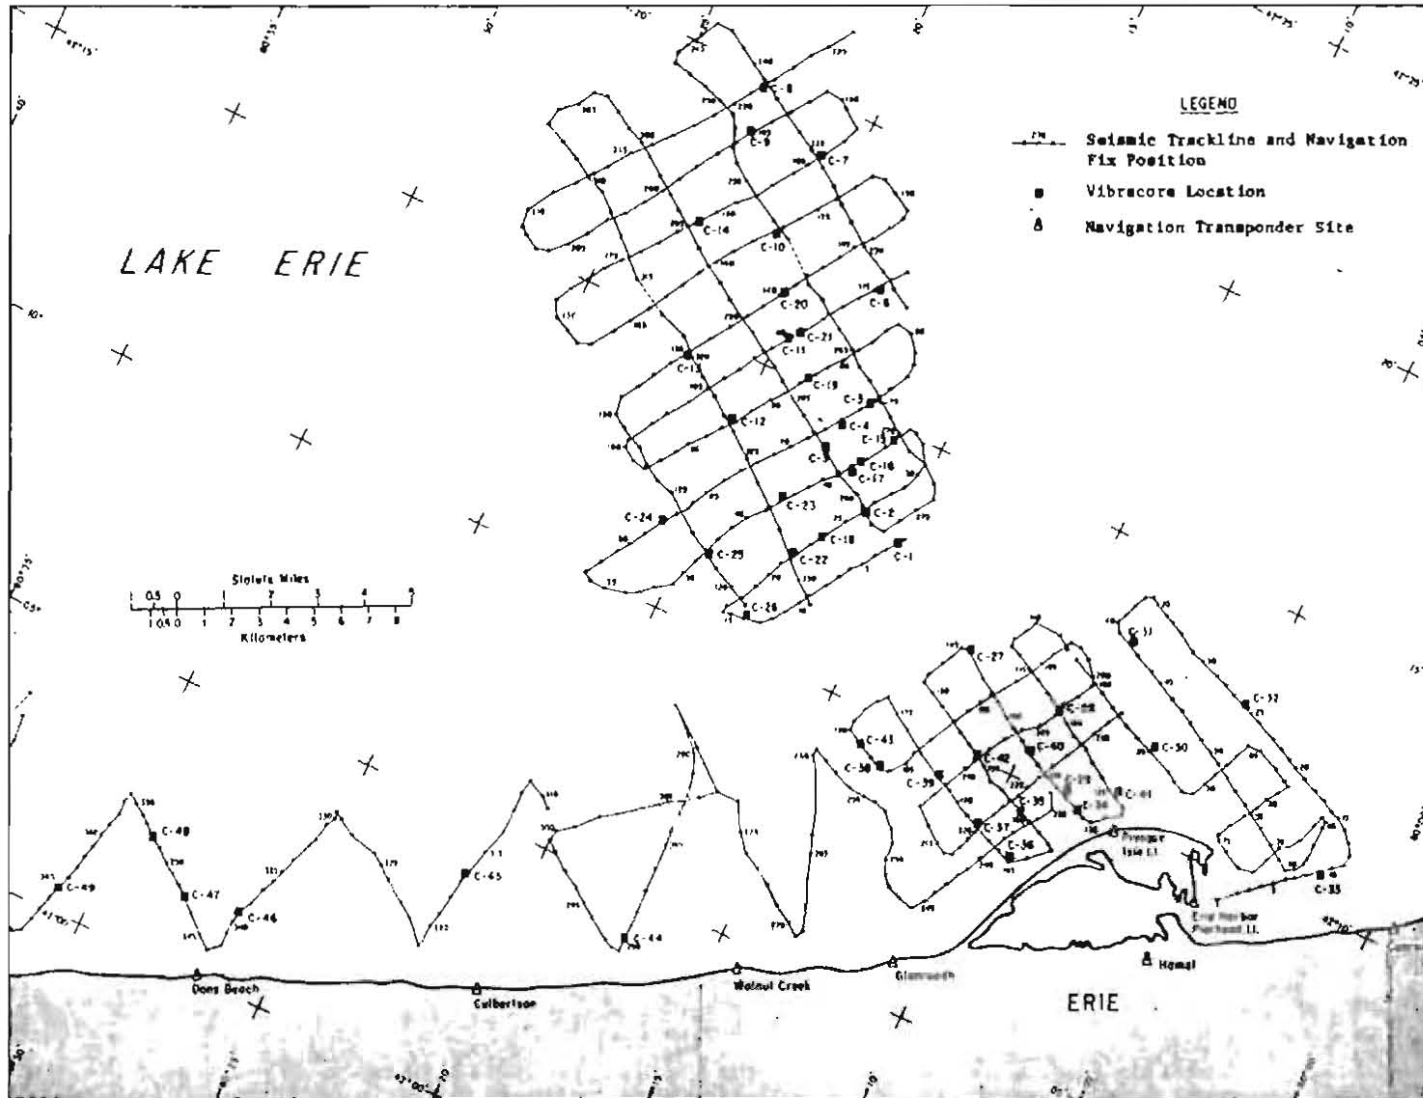


Figure 2. Data coverage of seismic profiles and vibratory cores.

basin comprising present-day Lake Erie was scoured by Pleistocene age glaciers, and numerous ancestral lakes occupied the basin following the latest glacial retreat about 12,000 years ago. These lakes fluctuated considerably in area and water level elevation depending upon climatic conditions and the degree of crustal isostatic rebound of the outlet to the Erie basin at Niagara Falls, New York. The presence of deeply incised stream valleys, shoreline deposits, and wave-cut shore terraces below present lake levels suggests that several lake stages below present have persisted, and these same features plus old lacustrine deposits presently subaerially exposed prove that some lake stages have been significantly higher than at present. The lacustrine deposits and sandy shoreline deposits are particularly evident in the study area.

Figure 3 shows that the nearshore region in the study area is characterized by generally shore-parallel contours out to -21 meters with the exception of the Presque Isle platform and spit as defined by the -12-meter contour, and a linear topographic feature off Dans Beach that trends northwest. A prominent elongate trough that reaches a maximum depth of about 23 meters parallels the shore about 11 kilometers off Erie. It attains a minimum width of 3.2 kilometers off the base of Presque Isle and widens eastward to a broad and gently sloping plain that reaches depths of 30 meters about 24 kilometers north of Erie. Westward the trough widens gradually to about 6.5 kilometers off the Ohio-Pennsylvania border.

North of the trough is a north-northwest trending linear ridge that is recurved as defined by the 20-meter contours in Figures 3 and 4. It has a crest elevation of about -15 meters and is asymmetrical with a steep slope eastward and a more gradual slope westward to -23-meter water depths. The main body of the ridge is 1.5 to 5.5 kilometers wide and extends northward across Lake Erie to the Canadian shore at the base of Long Point (Fig. 4). This ridge is the major boundary between the deep eastern section of Lake Erie basin and the more shallow central section, and as will be discussed later, has been very important to the origin and evolution of Presque Isle Peninsula.

3. Data Analysis.

The seismic profiles collected were visually examined and marked to establish the primary geologic features to depths of about 23 meters below the lake floor, the maximum penetration and resolution of the systems used. Regional geologic reflectors were mapped, identified, and where possible correlated with sedimentary materials recovered in the cores.

The cores collected were sent to the CERC laboratory where they were split open lengthwise, described, and sampled in detail to include the sediment textural characteristics, sand composition, color, relative strength of cohesive materials, and presence of organic materials that might be radiocarbon dated to give absolute geologic ages of the sediments. Complete logs of the cores (App. A) include water depth at each site, length of recovered sediment, and thickness of each sedimentary unit as measured from the top of the core. The grain-size descriptions are based on the Wentworth classification as shown in Table 1.

Appendix B contains results from grain-size analysis using the Rapid Sediment Analyzer (RSA) for fine- to coarse-grained sands and sieve analysis for

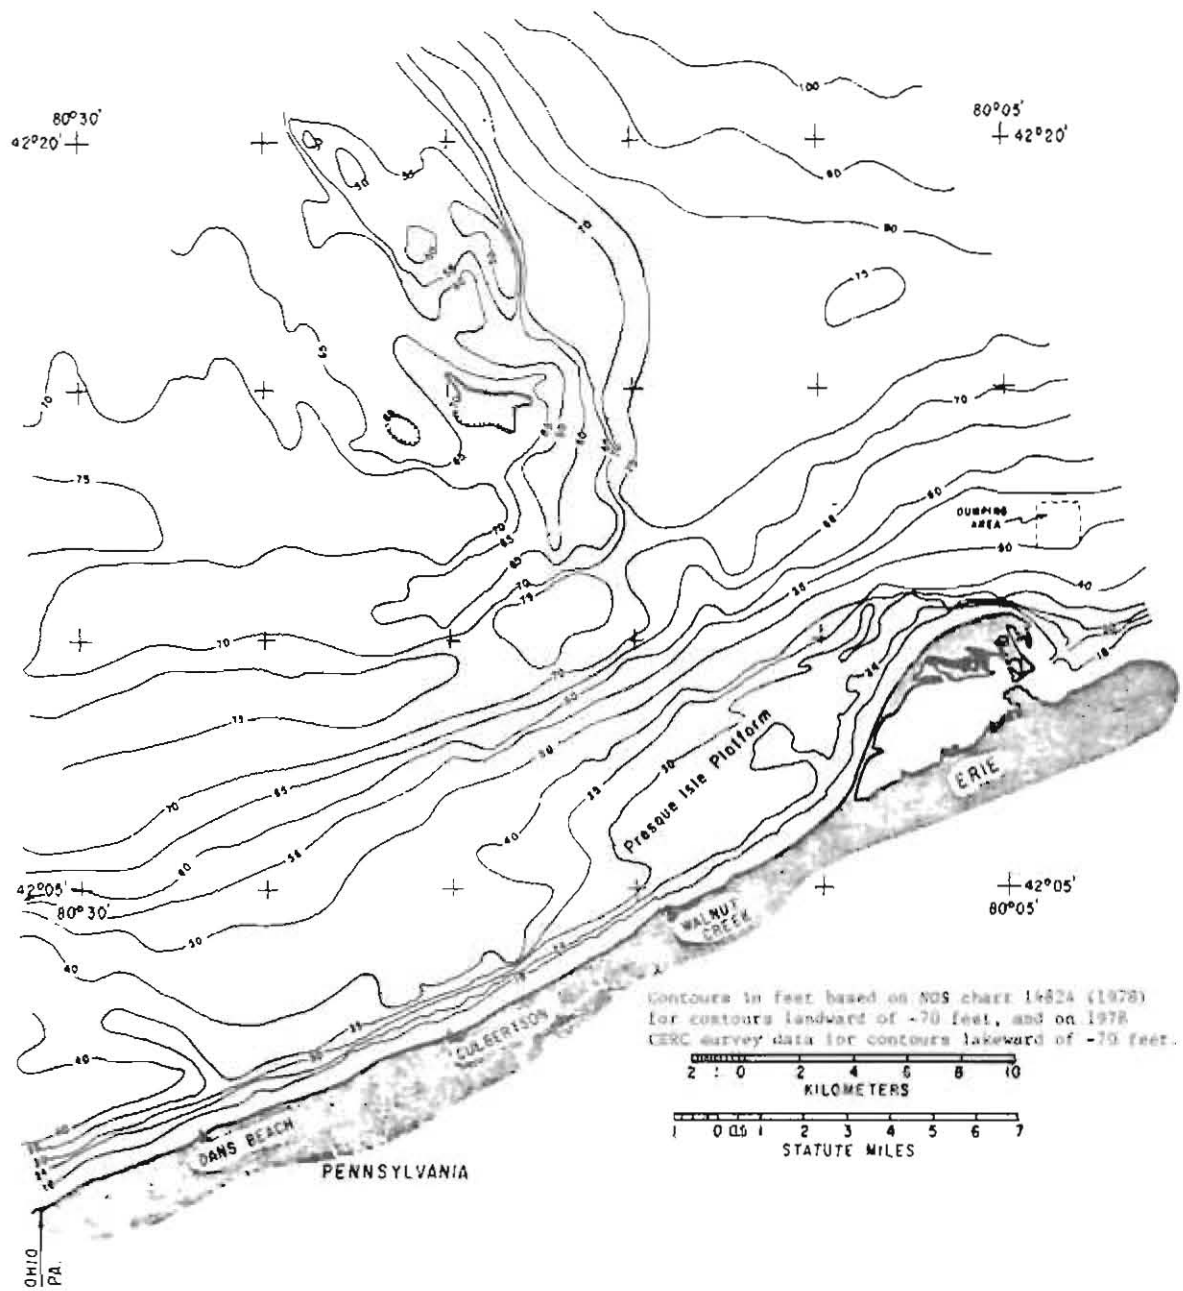


Figure 3. Bathymetric map of the study area.

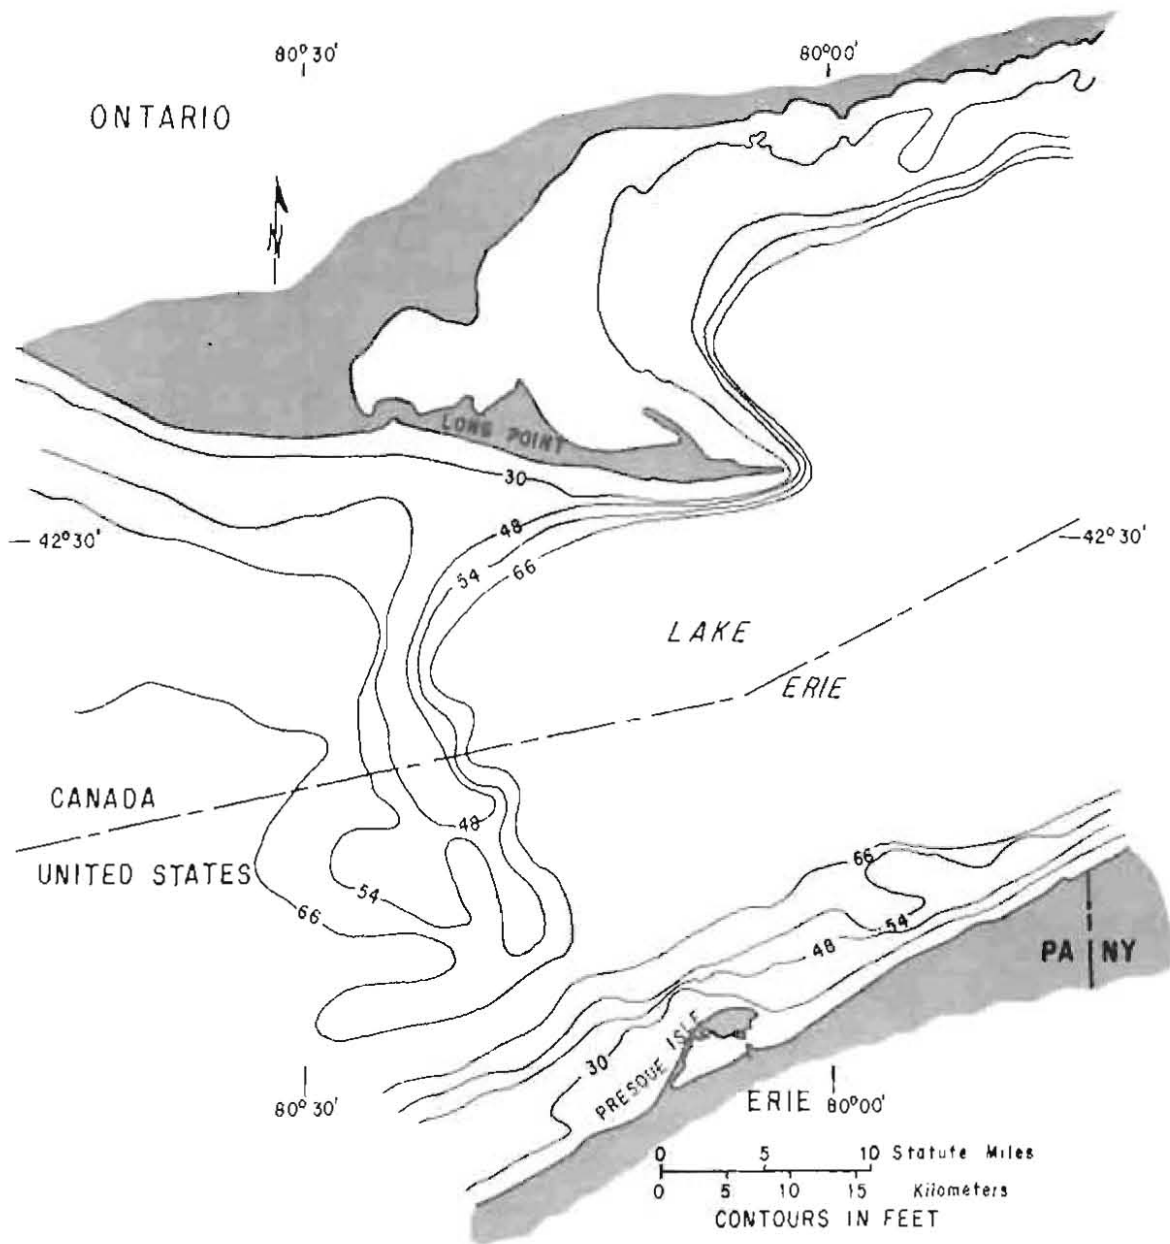


Figure 4. Map of the central Lake Erie basin showing the transverse ridge that connects with Long Point and projects toward Presque Isle.

Table 1. Grain-size scales-soil classification (U.S. Army, Corps of Engineers, Coastal Engineering Research Center, 1977).

Unified Soils Classification		ASTM Mesh	mm Size	Phi Value	Wentworth Classification	
COBBLE			256.0	-8.0	BOULDER	
			76.0	-6.25	COBBLE	
COARSE GRAVEL			64.0	-6.0	PEBBLE	
			19.0	-4.25		
FINE GRAVEL			4.76	-2.25	GRAVEL	
			4			
SAND	coarse		5	4.0	-2.0	very coarse
			10	2.0	-1.0	
	medium		18	1.0	0.0	coarse
			25	0.5	1.0	
			40	0.42	1.25	
	fine		60	0.25	2.0	medium
			120	0.125	3.0	
			200	0.074	3.75	
SILT			230	0.062	4.0	very fine
			0.0039	8.0		
CLAY			0.0024	12.0	SILT	
					CLAY	
					COLLOID	

coarser core samples; 128 RSA analyses were performed and 20 samples were seived. An additional 23 sediment grab samples from an August 1976 survey of 8 lake floor profiles normal to Presque Isle (Fig. 5), obtained from Professor P. Knuth (Edinboro State College), were analyzed. The RSA and sieve results for these are also in Appendix B.

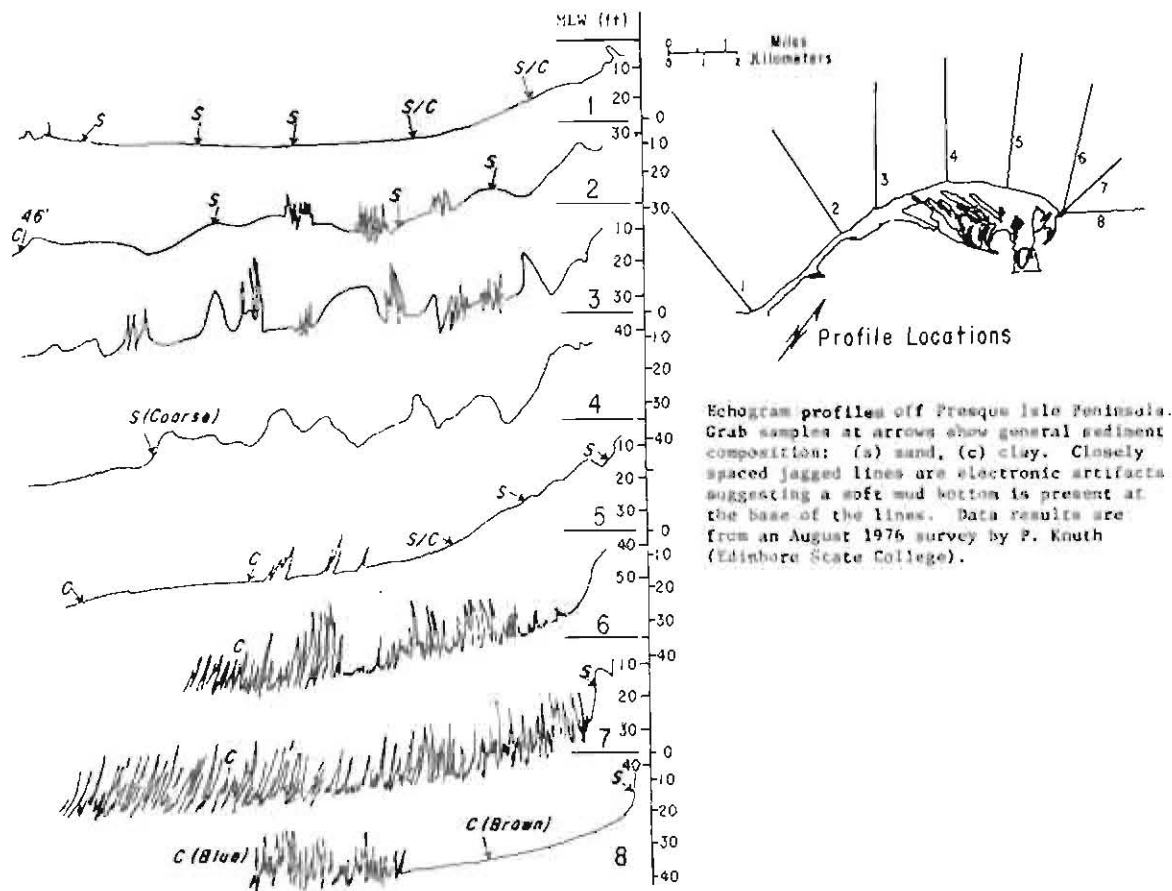


Figure 5. Shore-normal profiles off Presque Isle.

II. RESULTS

1. Primary Geologic Units.

Analyses of the seismic profiles and the cores show that four major geologic units are present in the study area: (a) Devonian age shale bedrock that comprises the eastern Erie basin and underlies the entire area; (b) Pleistocene age glacial sediments that include a complex assortment of till, stratified glaciofluvial debris, and lacustrine silt and clay from ancestral lakes; (c) beach and dune sand deposits that comprise the offshore ridge and the Presque Isle platform and peninsula; and (d) soft organic muds that cover much of lake floor in deeper areas and mantle the older deposits.

a. Shale Bedrock. Figure 6 shows the extent and general relief of the bedrock surface based on the seismic data and logs from three deep borings. Because of the limited penetration on some profiles, bedrock was not mapped in detail throughout the study area; however, contour trends were drawn from the data points in Figure 6. Shale crops out along the shoreline in the study area but is covered in some areas by glacial and lacustrine deposits and unconsolidated masses of material from cliff slumping. Figures 7, 8 (profile A), and 9 show that the shale surface slopes lakeward and crops out at the lake floor to water depths of 9 to 12 meters. The relief is sometimes irregular; Figure 6 shows that bedrock reaches a maximum depth of -87 meters about 17.6 kilometers northwest of Presque Isle. Clearly, its depth in all areas, except within several hundred meters of the shore, is great enough to not interfere with dredging operations.

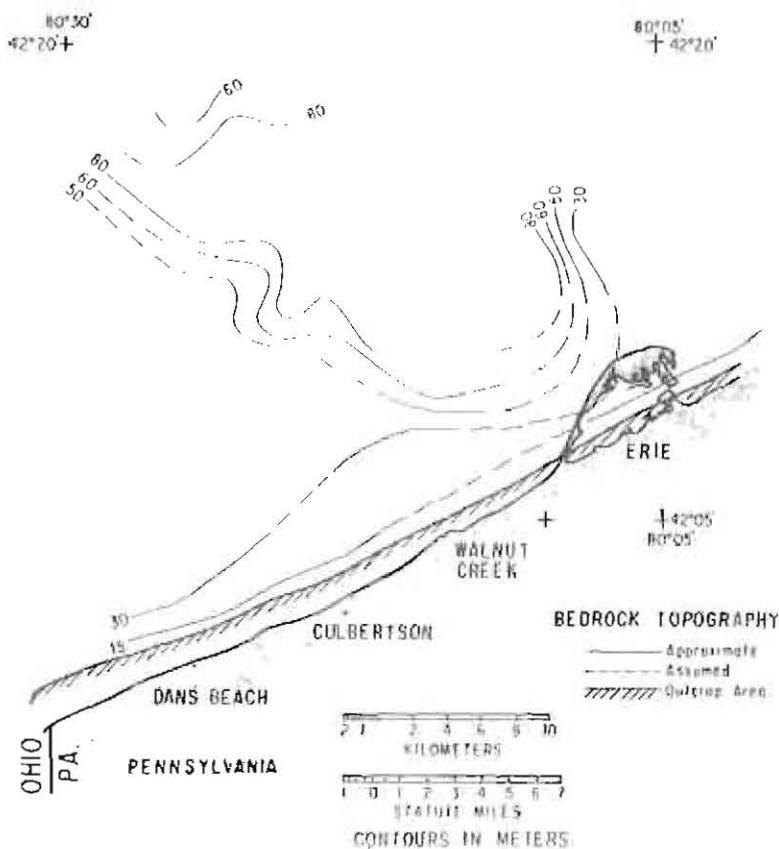


Figure 6. Map of the shale bedrock surface.

b. Glacial Deposits. These unconsolidated sediments, which comprise the largest volume of any sedimentary unit in the region, overlie the shale bedrock and are most important as sources of sand and gravel. Several of the seismic profiles show that the offshore ridge originated as a glacial moraine that crossed the Lake Erie basin and was at one time continuous from shore to shore before development of modern Lake Erie. Its unofficial name is the Long Point-Erie Moraine. Parts of the moraine appear to be unstratified and may contain very coarse materials such as boulders; however, most of the ridge appears to be stratified and composed of poorly sorted, fine to very coarse sands and gravel. The main body

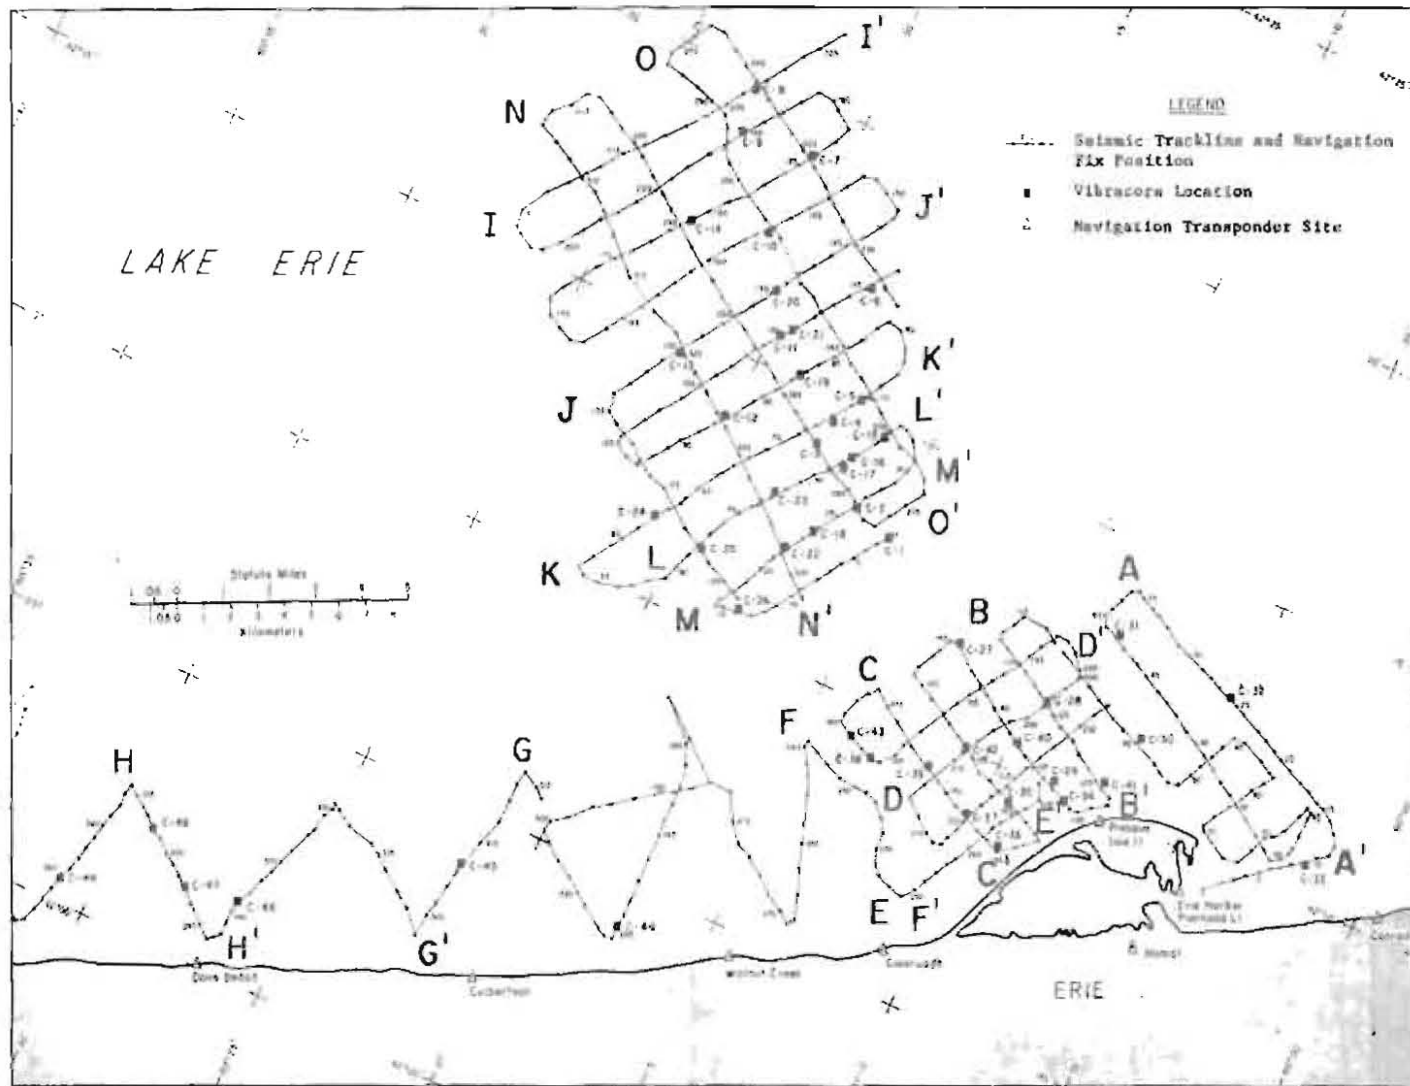


Figure 7. Locations of the interpreted seismic profiles.

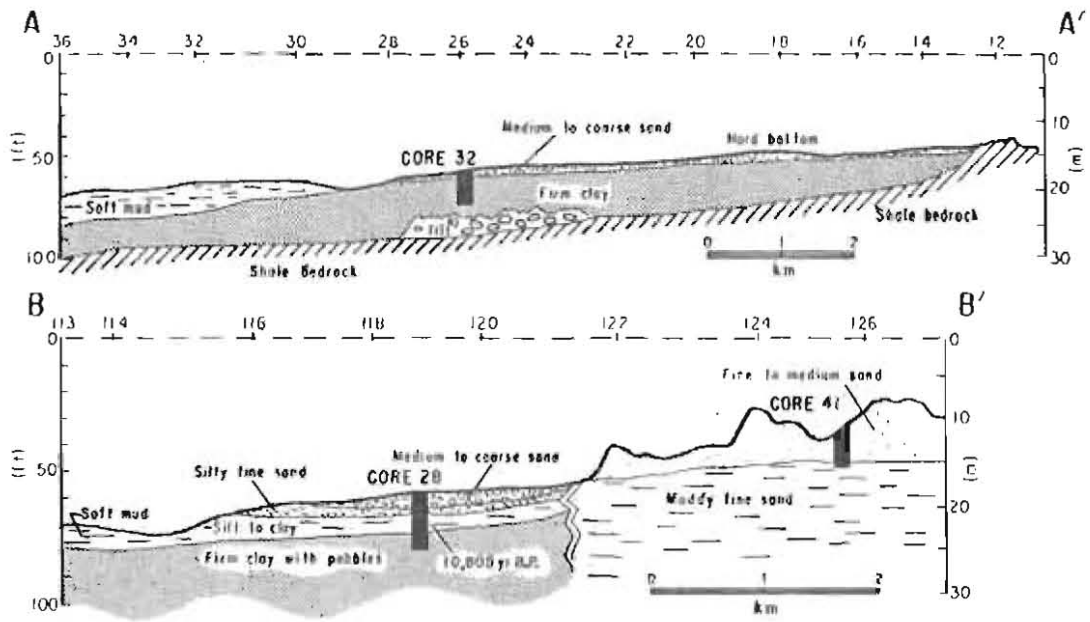


Figure 8. Profiles A and B off Presque Isle.

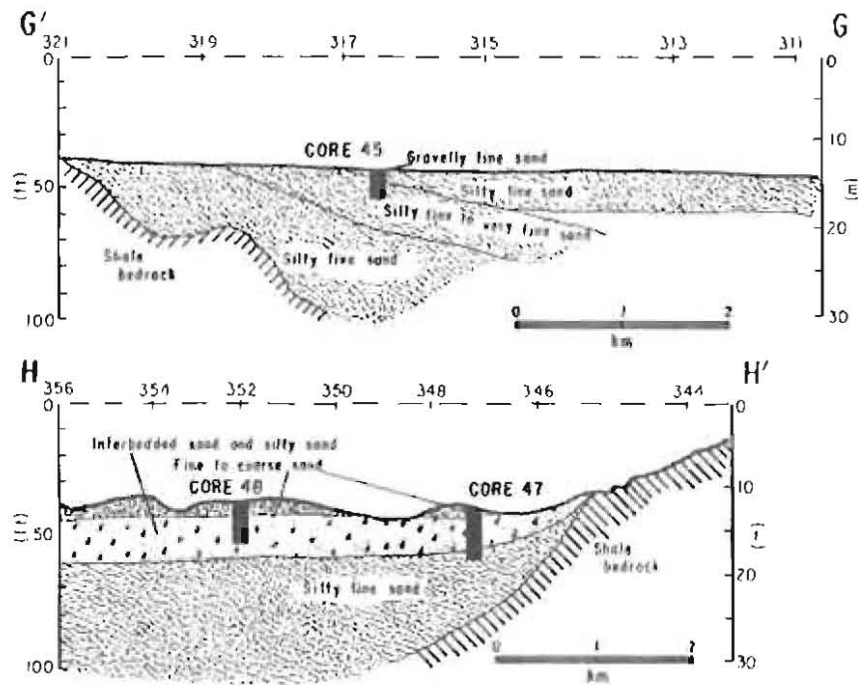


Figure 9. Profiles G and H west of Presque Isle.

of the moraine (Fig. 10) comprises the ridge and the flat elevated platform immediately west of Presque Isle, but there is some evidence that minor glacial deposits or erosional remnants are present several kilometers east of Presque Isle and also northwest of the shore of Dans Beach near the Ohio border. All these glacial deposits appear to be related to the same glacial event, which is likely the Port Huron advance that has been age-dated by several investigators at about 13,000 years before present (B.P.).

Adjacent to the ridge is a gray-brown firm clay unit with scattered rounded pebbles at the lake floor; several cores and seismic profiles show that it has considerable thickness. The unit is most likely lacustrine in origin and was deposited in an earlier Lake Erie formed when the moraine dammed and backed up normal melt-water drainage. The clay unit's firm nature suggests that it is slightly overconsolidated, possibly the result of subaerial exposure when the ridge was breached and the lake level dropped. Erosion of the clay unit to the west of the ridge has left a lag deposit veneer of coarse-grained sediment in places that form isolated ridges with relief of several meters. Some of these small ridges, which are semiparallel to the main ridge, are asymmetric suggesting that they may be active and maintained by bottom currents caused by wind shear or barometric seiche action.

c. Beach and Dune Deposits. Following retreat of the glacier that deposited the Long Point-Erie Moraine, the outlet at Niagara Falls rebounded in elevation and present-day Lake Erie was formed.

The radiocarbon-14 dates of wood fragments contained in cores 4, 18, 23, and 28 (Table 2, Fig. 11) show that as early as about 11,000 years ago lake levels were still at least 22 meters below the present levels and remained there until at least $6,870 \pm 150$ years B.P. As lake levels gradually rose during this time the ridge and Presque Isle platform were high-energy coastal areas subjected to active littoral processes. The glacial tills were washed and sorted, and much of the fine-grained sediment was carried offshore and ultimately deposited in deeper parts of the basin. The beach and dune deposits that mantle the ridge and platform were derived directly from erosion of local glacial debris. The stabilization of lake levels over the past several thousand years has resulted in the sand being eroded from the ridge-platform and transported eastward to form Presque Isle Peninsula.

d. Modern Soft Mud. Several of the cores in deeper water adjacent to the Presque Isle platform and ridge contain gray, very soft mud with high water content and very low shear strength. Figure 5 shows that mud is especially common east of Presque Isle, and also present in troughs on the platform northwest of Presque Isle. Fine-grained material is being deposited at the present time throughout much of the Lake Erie basin except for relatively high-energy areas, such as along the coast or on elevated areas. The predominance of muddy sediment in the samples east of Presque Isle and the lack of sand suggest that sand from the eastern end of Presque Isle is not being transported eastward off the platform in any significant volume.

2. Potential Sand and Gravel Deposits.

Analyses of the seismic and core data show that two separate areas, the ridge-platform moraine complex and the moraine ridge segment off Dans Beach, contain large quantities of clean (small percentages of silt and clay),

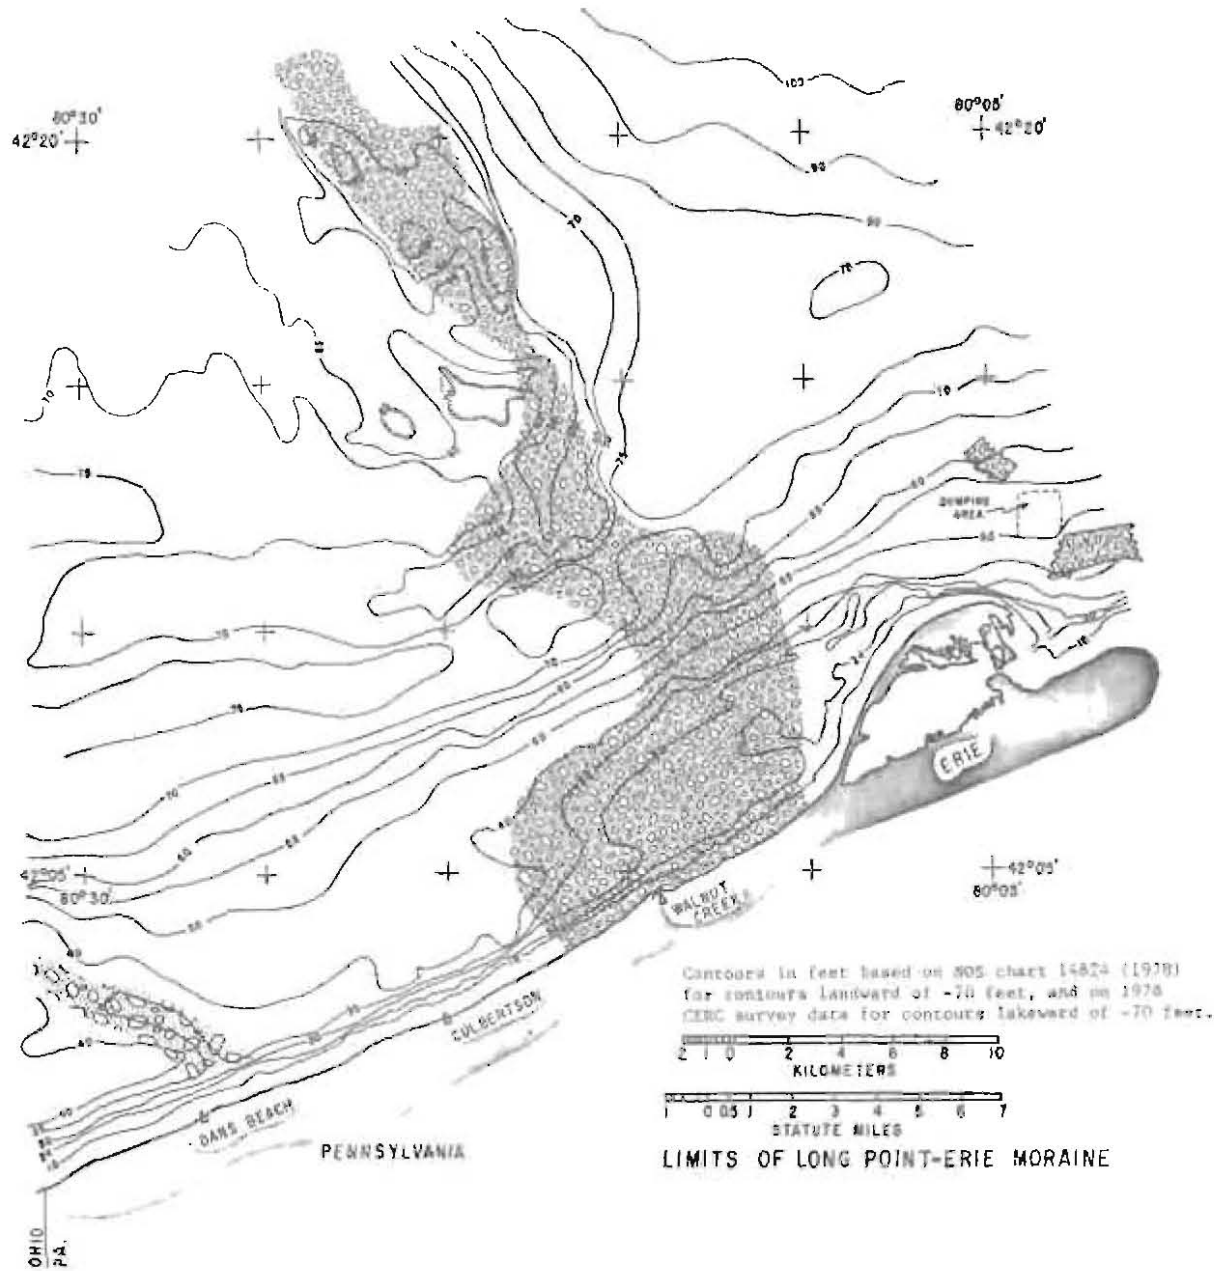


Figure 10. Extent of probable moraine segments in the study area based on the seismic and core data.

Table 2. Summary of wood fragments present in eight cores and radiocarbon-14 age date results.

Cores	Water depth (-m)	Sediment depth to wood (m)	Total depth of wood (-m)	Corrected carbon-14 age (yr B.P.)	Matrix composition
1 ¹	23.2	1	24.1		Sand
4	20.4	1	21.5	3,240 ± 210	Silty sand
17 ¹	17.7	2.4	20		Sand
18	18.5	3.6	22	6,870 ± 150	Sand
23	19.2	2.2	21.4	8,545 ± 150	Sand
23 ¹	19.2	2.5	21.7		Sand
28	18.4	3.5	21.9	10,800 ± 190	Firm clay
39 ¹	13	3.3	16.2		Sand

¹ Sample too small for age dating.

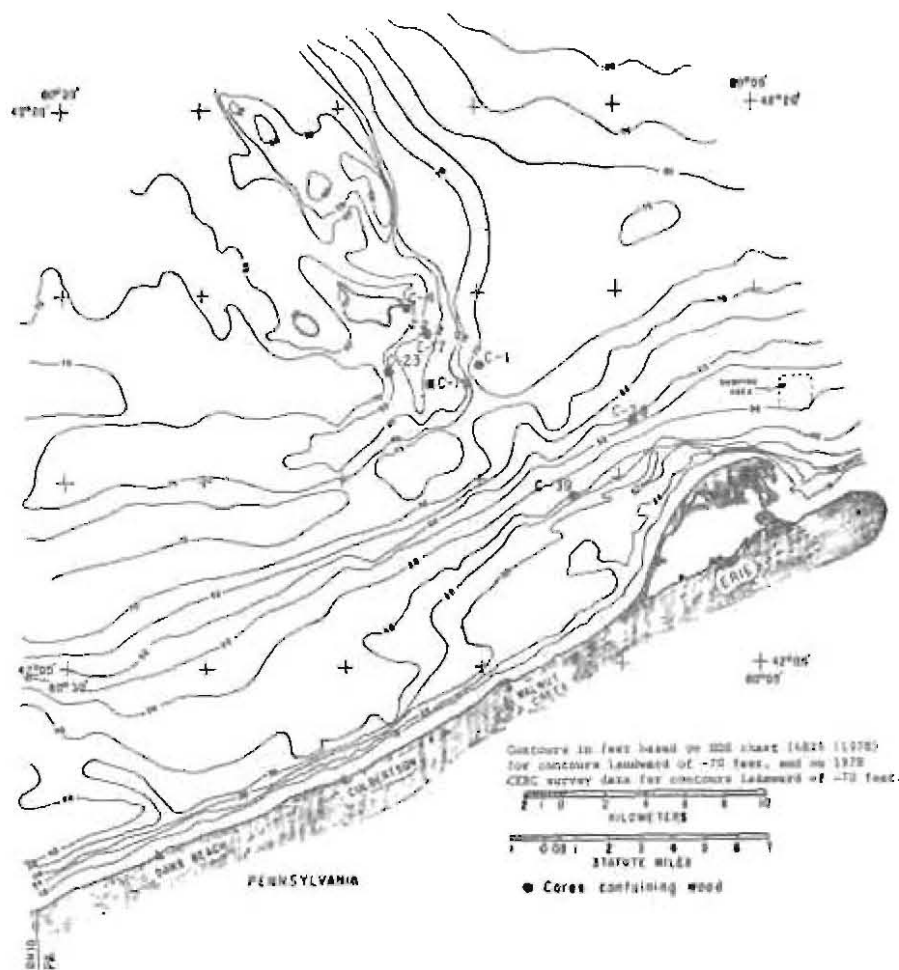


Figure 11. Cores containing wood fragments.

medium- to coarse-grained sand mixed with gravel (Fig. 12). The area with greatest potential is the ridge-platform moraine complex; the moraine ridge segment off Dans Beach is considerably lower in potential. Figure 7 shows the locations of representative profiles B to F and I to O for the first area and profile H for the second area. Interpretations are shown in Figures 8, 9, and 13 to 18.

A total of 13 cores (2, 5 to 10, 15 to 18, 22, and 25) are fairly evenly distributed over the Long Point-Erie ridge to the Canadian border and all contain clean, generally medium to coarse sand with varying percentages of pebbles and gravel. The minimum thickness of sand is 0.76 meter (core 22, Fig. 17), while the maximum recovery is 3.9 meters (core 17, Fig. 16). The average sand thickness for the 13 cores is 2.3 meters; however, the seismic profiles show that sand and gravel are about 5 to 6 meters thick in the main body of the ridge and thin to zero at the flanks where contact is made with the firm lacustrine clay.

The area of the ridge shown in Figure 12 has been computed to be 20.3 million square meters; using a conservative figure of 1.7 meters for thickness, the estimated volume of sand is 37.2 million cubic meters.

The platform to the west and slightly lakeward of Presque Isle has a glacial origin in common with the Long Point-Erie ridge, and the seismic profiles and cores 28, 40, and 41 show the platform is composed of generally medium to coarse sand and pebbles overlying silty fine sands or firm lacustrine clay. Detailed bathymetric charts and the profiles (see Fig. 8, profile B) show that the platform surface is made up of several irregular shoals which semiparalled the Presque Isle shore and have maximum relief of about 4.5 meters. The origin of these shoals is likely to be related to glacial processes with subsequent reforming and winnowing of the topmost sediment by modern lake processes. However, the shoals could also be relict, drowned beach ridges from an earlier and more lakeward position of Presque Isle.

Although there has been some speculation, based on historic migration rates, that Presque Isle has migrated considerable distances since its formation, this study has shown that it is the product of erosion of glacial sediments on the adjacent platform and ridge. This suggests that Presque Isle has migrated no more than 8 kilometers in the past several thousand years.

The area on the platform encompassing cores 28, 40, and 41 (Fig. 12) is about 1.7 million square meters, using a sand thickness of 0.9 meter, the estimated volume of material is 1.6 million cubic meters. However, there are several important factors that should be considered before the shoals on the platform are viewed as borrow sources. The other CERC cores on the platform and the grab samples show that the sediments from the platform are more variable in grain size and composition than the sediments from the offshore ridge. Therefore, the chances are greater that this material may have high proportions of silt, clay, and very fine sand, which would lessen its potential for being stable as fill. A second and possibly even more important consideration is that these shoals may be directly related to the nearshore sand transport regime, which would affect alongshore wave energy distributions along Presque Isle. Sand from Presque Isle beaches may move offshore and incorporate with the shoals under storm conditions, and then return to the shoreface-beach under fair-weather conditions. If a borrow pit were dredged in water that is too shallow littoral processes may remove sand from the shore zone in an attempt to refill the

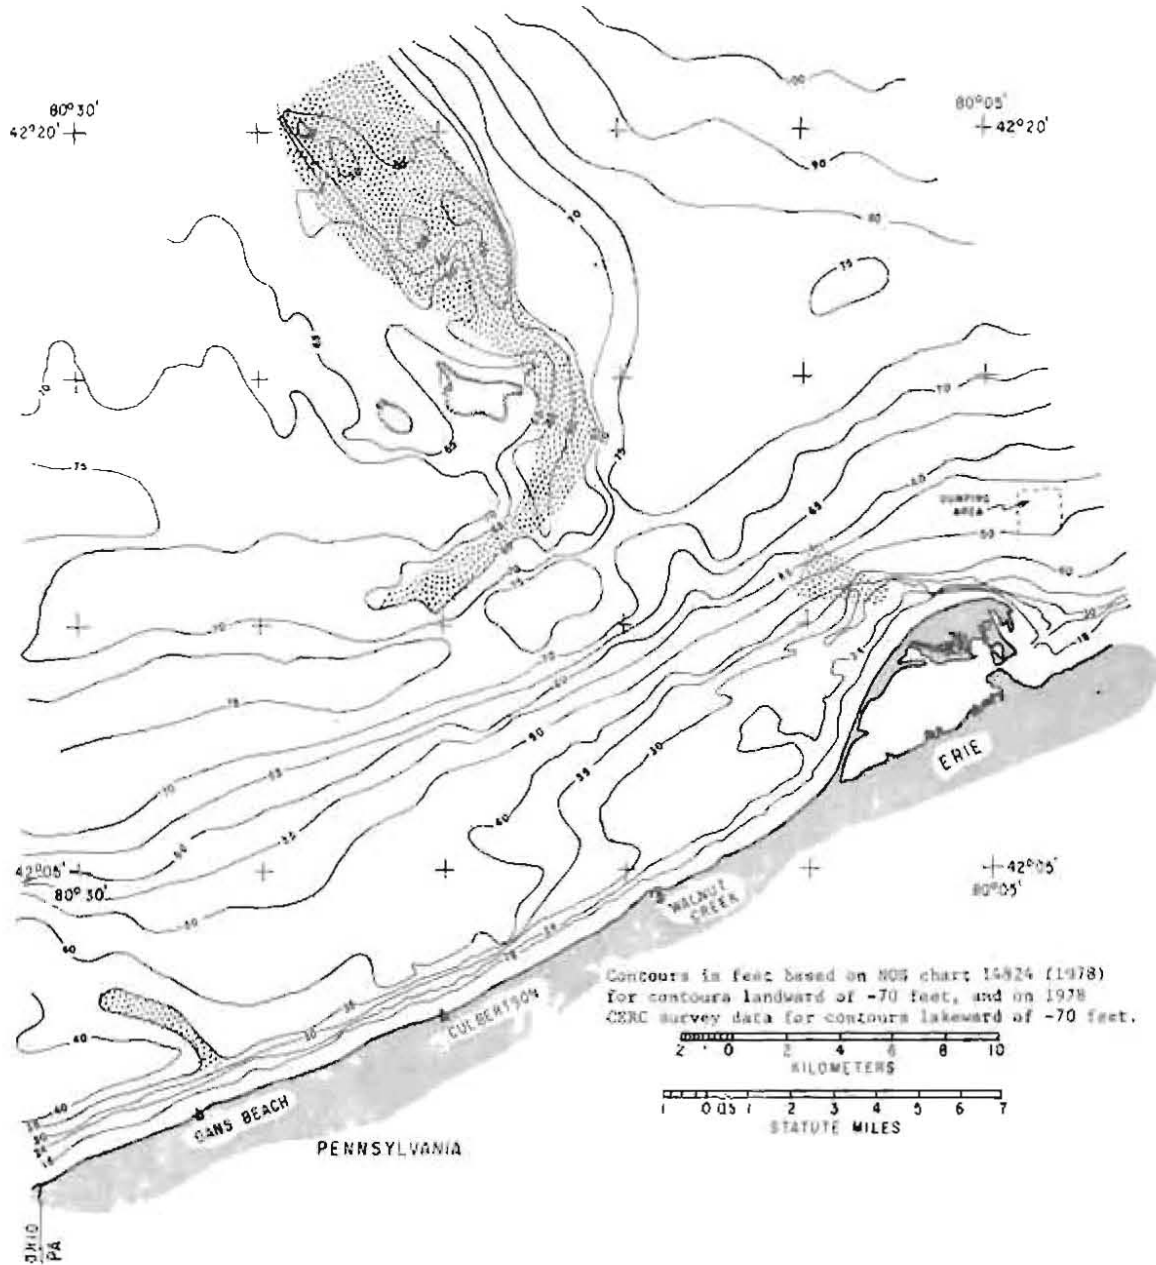


Figure 12. Map of potential borrow areas for sand and gravel.

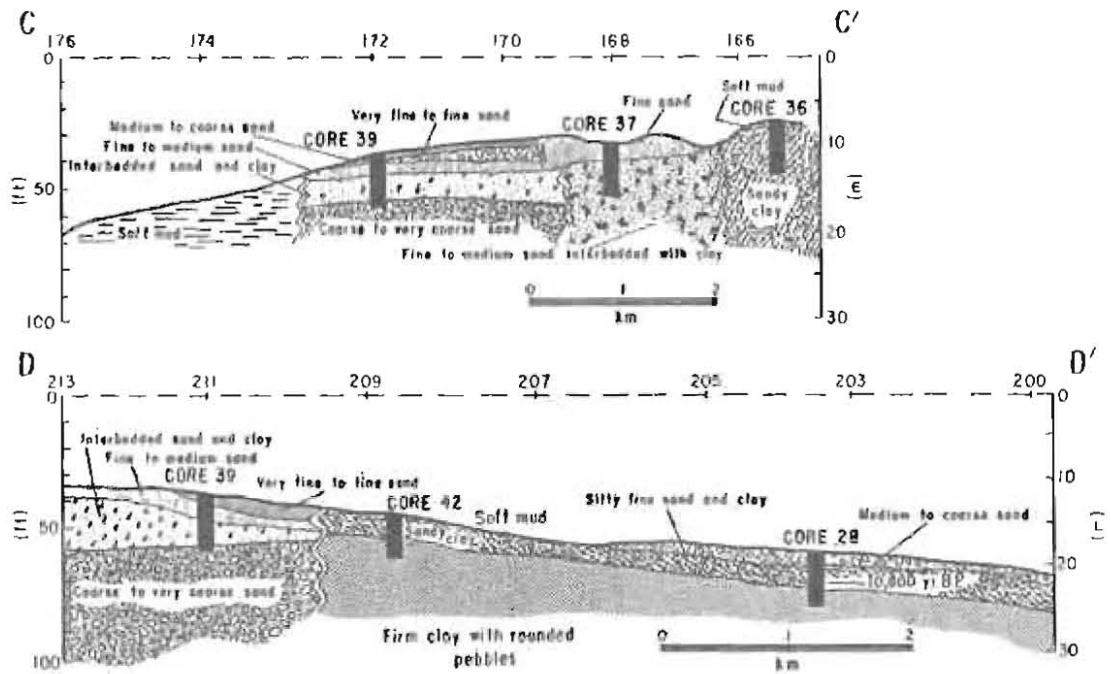


Figure 13. Profiles C and D.

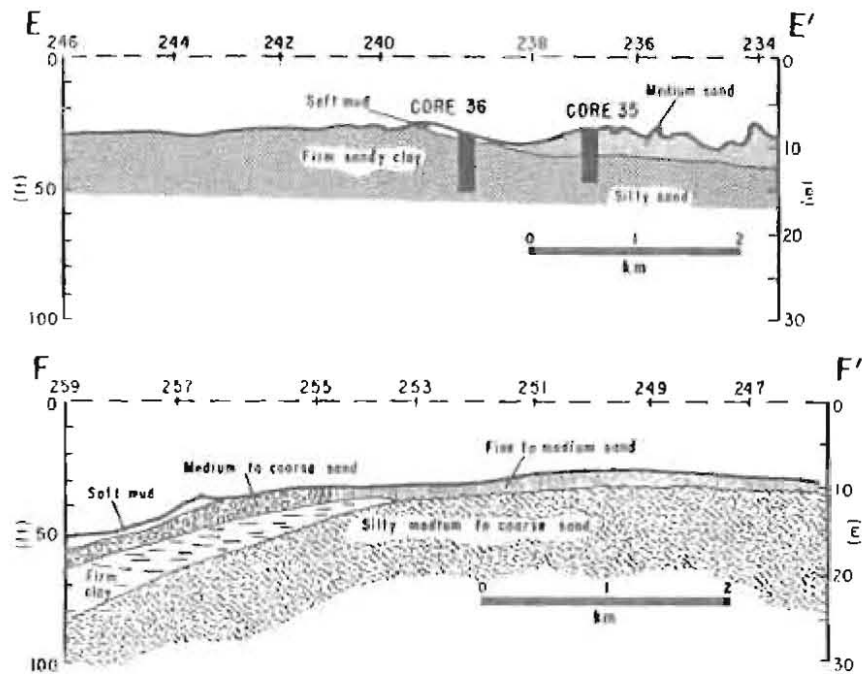


Figure 14. Profiles E and F.

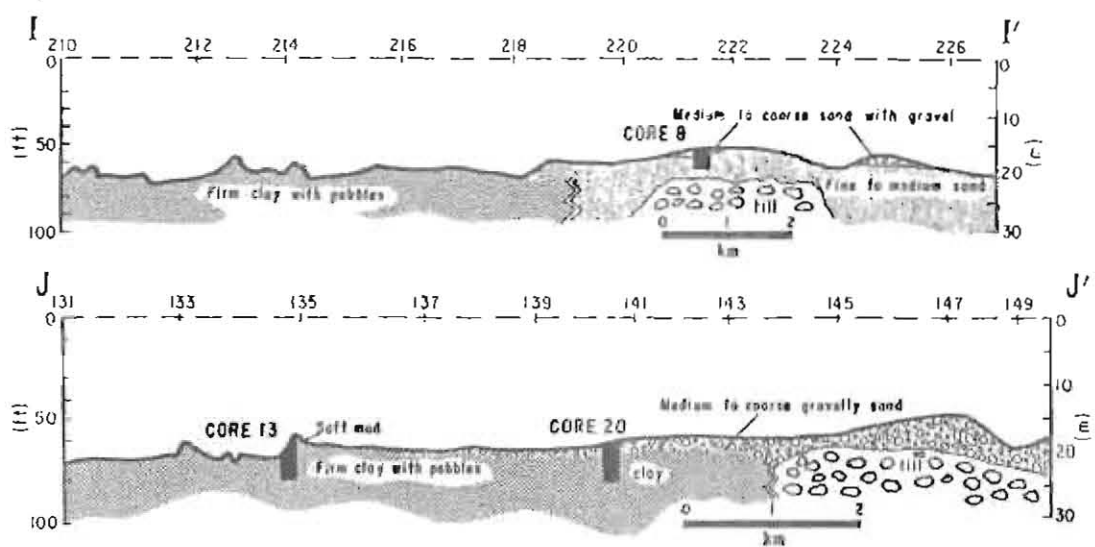


Figure 15. Profiles I and J.

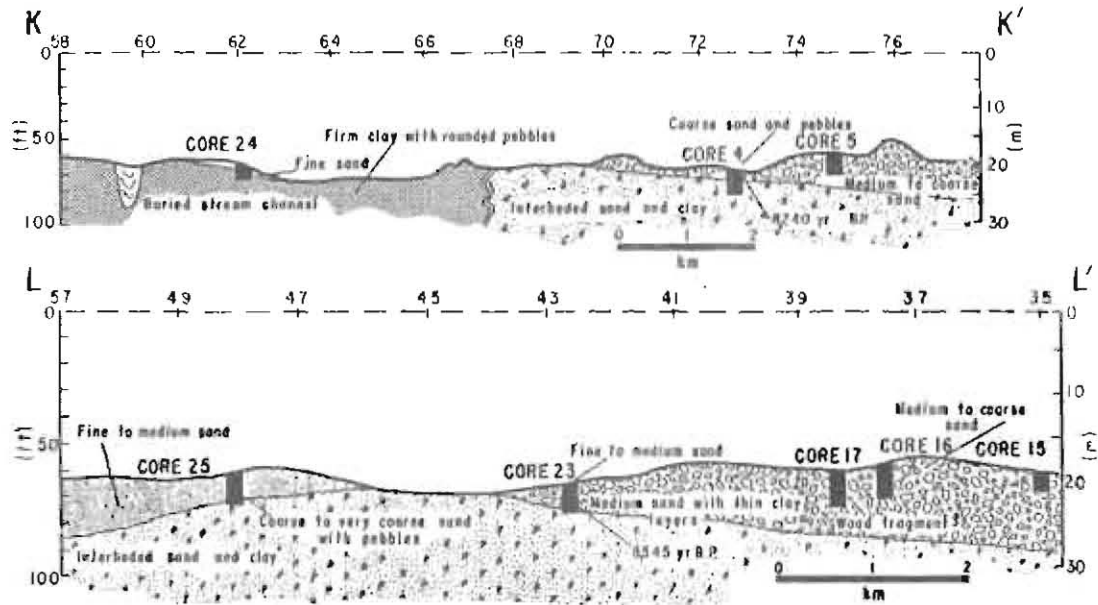


Figure 16. Profiles K and L.

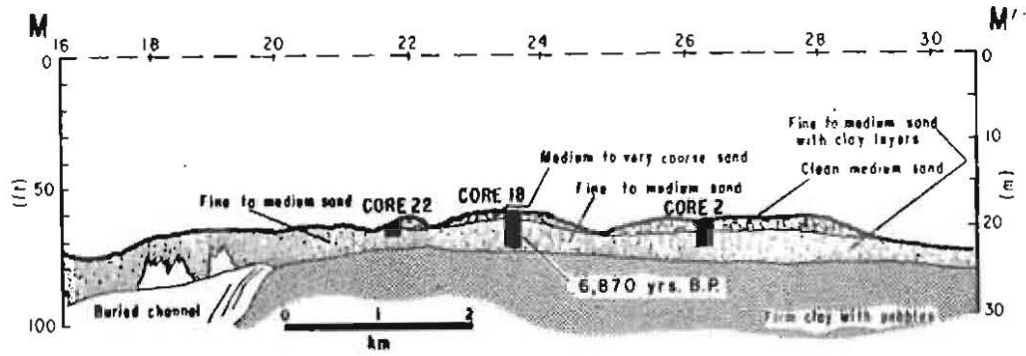


Figure 17. Profile M.

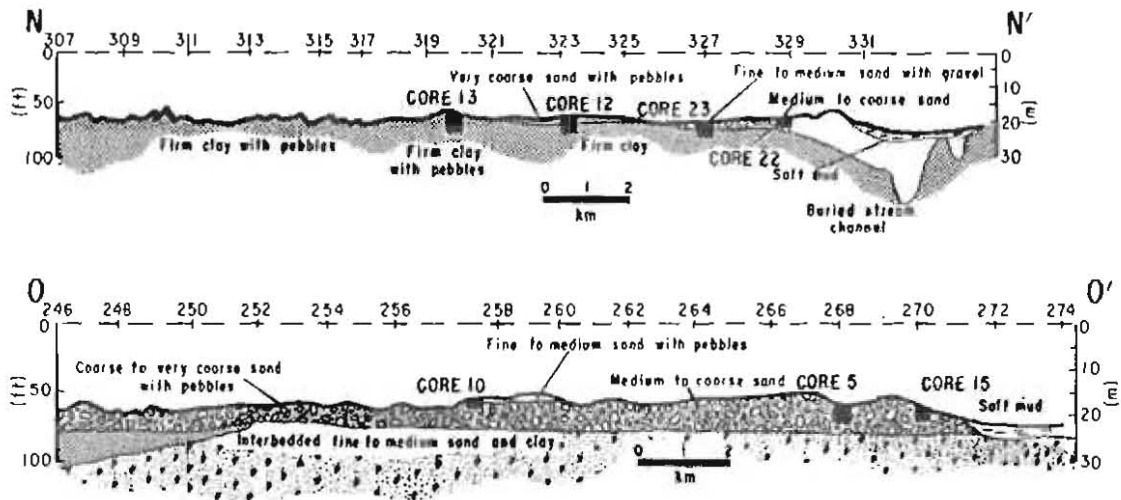


Figure 18. Profiles N and O.

pit and maintain an equilibrium shoreline profile. Also, the shoals on the platform may act to filter and dissipate wave energy, and removal of sand from the shoal crests could increase levels of wave energy impinging on Presque Isle.

The morainal ridge segment off Dans Beach (Fig. 9, profile H) is shown by cores 47 and 48 to contain 0.5 and 1.6 meters, respectively, fine to coarse sand. The ridge feature is 4.8 kilometers long and several hundred meters wide and is judged to contain several million cubic meters of sand. However, its distance of 25 kilometers from Presque Isle and its closeness to shore detract significantly from the potential of the ridge as a source of borrow material.

LITERATURE CITED

- BERG, D.W., and DUANE, D.B. "Effect of Particle Size and Distribution on Stability of Artificially Filled Beach, Presque Isle Peninsula, Pennsylvania," *Proceedings of the 11th Conference on Great Lakes Research*, 1968, pp. 161-178 (also Reprint 1-69, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., NTIS 694 204).
- CARTER, C.H., et al., "Regional Geology of the Southern Lake Erie Bottom Between Conneaut and Marblehead, Ohio," U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va. (In preparation, 1982).
- U.S. ARMY ENGINEER DISTRICT, BUFFALO, "Presque Isle Peninsula, Erie, Pennsylvania," General Design Memorandum, Phase I, Buffalo, N.Y., 1979.
- U.S. ARMY, CORPS OF ENGINEERS, COASTAL ENGINEERING RESEARCH CENTER, *Shore Protection Manual*, 3d ed., Vols. I, II, and III, Stock No. 008-022-00113-1, U.S. Government Printing Office, Washington, D.C. 1977, 1,262 pp.
- WILLIAMS, S.J., et al., "Sand Resources of Southern Lake Erie, Conneaut to Toledo, Ohio - A Seismic Reflection and Vibrocore Study," MR 80-10, U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Fort Belvoir, Va., Nov. 1980.

APPENDIX A
CORE SEDIMENT DESCRIPTIONS

Table. Sediment descriptions of Lake Erie cores (based on Wentworth classification).

Core No.	Water depth (m)	Core length (m)	Interval (m)	Description	Core No.	Water depth (m)	Core length (m)	Interval (m)	Description			
1	23.2	3.9	0 to 1.2	Dark gray, fine to medium sand, well laminated, 10-cm-long wood fragment at -1.0 m.	6	15.0	2.7	0 to 2.7	Clean, gray, medium to coarse, well sorted sand; no layering, shells or pebbles.			
			1.2 to 2.6	Interbedded fine to medium sand and clay.				7	16.5	1.7	0 to 1.5	Clean, gray, fine to medium, moderately well sorted sand; no layering, shells or pebbles.
			2.6 to 2.7	Clean, medium to very coarse sand with pebbles.							1.5 to 1.6	Clean, gray, coarse to very coarse sand and gravel (≤ 1.2 -cm diameter).
			2.7 to 3.9	Tan-gray, cohesive clay containing several rounded pebbles (≤ 7.5 -cm diameter).							1.6 to 1.7	Clean gray, fine to medium sand.
2	19.6	3.2	0 to 1.7	Clean, moderately well sorted medium sand.	8	15.8	3.3	0 to 0.8	Clean, gray-brown, medium to coarse sand.			
			1.7 to 3.2	Fine to medium sand with thin clay layers.				0.8 to 1.1	Gray-brown, coarse to very coarse sand with rounded pebbles (≤ 4 -cm diameter).			
3	20.1	2.7	0 to 0.5	Clean, moderately sorted, medium sand with scattered pebbles (≤ 2.5 -cm diameter).				1.1 to 3.3	Clean, gray, medium sand, grading down to fine sand.	9	17.1	4.8
			0.5 to 0.8	Moderately well sorted, fine sand with thin clay layer at -0.6 m.	1.5 to 2.1	Clean, gray, fine to medium sand.						
			0.8 to 0.9	Fine sand, abundant mollusk shells.	2.1 to 3.0	Interbedded, fine sand and clay (equal volumes of sand and clay).						
4	20.4	4.2	0 to 0.2	Medium to coarse sand with rounded pebbles (≤ 2.5 -cm diameter).	3.0 to 3.5	Same as above interval but clay predominates over sand.	10	17.7	1.9	0 to 0.3	Clean, gray-brown, fine to medium sand with coarse grains, shells and rounded pebbles (≤ 8 -mm diameter).	
			0.2 to 0.7	Interbedded, gray clay and fine to medium sand, sharp contacts; clay predominates.	3.5 to 4.8	Gray-brown, fine, cohesive clay.				0.3 to 1.5	Clean, gray, fine to medium sand; no shells or pebbles.	
			0.7 to 2.4	Same as above interval but sand predominates; wood fragment at -1.0 m.	1.5 to 1.6	Brown, cohesive clay; sharp contacts with sand above and below.				1.6 to 1.9	Same as second interval above.	
			2.4 to 3.1	Tan-gray clay with thin fine sand layers.	11	19.6				4.8	0 to 2.0	Gray-brown, soft, uniform textured mud; becomes firmer with depth; rounded pebbles (≤ 3.5 cm long) on top.
			3.1 to 3.8	Dark brown, medium sand.								
			3.8 to 3.9	Tan-gray clay.								
3.9 to 4.2	Dark brown, fine sand.											
5	19.6	3.0	0 to 3.0	Gray, medium to coarse sand becoming fine with depth; shell fragments at -2.7 m.								

Table. Sediment descriptions of Lake Erie cores (based on Wentworth classification). --Continued

Core No.	Water depth (m)	Core length (m)	Interval (m)	Description	Core No.	Water depth (m)	Core length (m)	Interval (m)	Description
			2.0 to 3.6	Same as above but thin sand layers also present.				0.7 to 2.1	Gray, interbedded clay and silty sand.
			3.6 to 4.8	Tan, firm, cohesive clay with scattered rounded (drop stone) pebbles, 5 cm long at -4.0 m.				2.1 to 2.4	Gray, silty, fine to medium sand with a few thin clay layers.
12	19.2	4.4	0 to 0.09	Very coarse sand and well-rounded pebbles, 5 cm long.				2.4 to 4.4	Gray, interbedded clay and silty sand.
			0.09 to 0.4	Clean, brown, very coarse sand, granules, and rounded pebbles.				4.4 to 6.1	Dark brown, moderately stiff, very plastic clay.
			0.4 to 0.7	Sharp contact, moderately firm, tan-gray clay.	20	18.6	5.3	0 to 1.2	Clean, gray-brown, moderately well sorted, medium to coarse sand; becomes gravelly at -1.1 m.
			0.7 to 0.8	Brown, coarse to very coarse sand and rounded pebbles.				1.2 to 1.4	Gray, fine sand.
			0.8 to 4.4	Moderately firm, tan-gray clay.				1.4 to 5.3	Gray-brown, soft clay.
13	20.3	5.3	0 to 0.06	Soft gray clay.	21	18.4	6.1	0 to 1.1	Clean, moderately well sorted, light gray, medium to coarse sand.
			0.06 to 5.3	Tan, moderately firm clay, very cohesive with scattered rounded pebbles.				1.1 to 1.3	Clean, gray, coarse and very coarse sand with pebbles.
			0 to 0.09	Brown, silty, very coarse sand.				1.3 to 1.4	Gray, moderately firm clay with granules.
			0.09 to 3.0	Brown, firm clay with scattered rounded pebbles.				1.4 to 6.1	Gray-brown soft clay.
14	19.6	3.0	0 to 1.8	Clean, dark gray, moderately well sorted, medium to coarse sand fining downward; no layering, pebbles or shells.	22	18.8	1.4	0 to 0.8	Clean, gray, medium to coarse to very coarse sand, thin mud layer at -0.8 m.
			0 to 3.6	Clean dark gray, well-sorted, medium to coarse sand.				0.8 to 1.4	Clean, gray, fine to medium sand.
15	18.6	1.8	0 to 3.9	Moderately well sorted, fine to medium sand with few thin silt and very fine sand layers; wood fragments at -2.4 m.	23	19.2	3.1	0 to 0.3	Clean, brown, fine to medium sand, gravelly from 0.2 m to 0.3 m.
16	20.4	3.6	0 to 1.0	Clean, gray, medium to very coarse sand that coarsens with depth; thin mud layer at 0.7 m.				0.3 to 2.2	Clean, light gray to brown, fine to medium sand with 2.5-cm clay layer at 2.0 m; wood fragment at -2 m.
			1.0 to 3.6	Sharp contact, moderately well sorted fine to medium sand, no layering, shells or pebbles; wood fragment at -3.6 m.				2.2 to 3.1	Light brown, medium sand with occasional 1 cm clay layers, wood fragment at -2.5 m.
17	17.7	3.9	0 to 0.7	Clean, gray, moderately sorted, medium to coarse sand.	24	21.7	1.7	0 to 0.7	Gray, silty, moderately sorted fine sand.
			0 to 0.7	Clean, gray, moderately sorted, medium to coarse sand.				0.7 to 1.7	Sharp contact; light brown-gray, stiff clay with scattered rounded pebbles.
18	18.5	3.6	0 to 2.7	Clean, gray, moderately well sorted, fine to medium sand.	25	18.6	3.8	0 to 2.7	Clean, gray moderately well sorted, fine to medium sand.

Table. Sediment descriptions of Lake Erie cores (based on Wentworth classification). --Continued

Core No.	Water depth (m)	Core length (m)	Interval (m)	Description	Core No.	Water depth (m)	Core length (m)	Interval (m)	Description
26	23.3	3.7	1.7 to 1.9	Medium to very coarse, poorly sorted sand with scattered rounded pebbles.	31	21.5	6.1	0 to 3.1	Gray, soft to very soft clay.
			1.9 to 3.2	Interbedded clay and fine to medium sand; 1.5-cm pebble at ~3 m.				3.1 to 3.2	Gray, silty sand.
			3.2 to 3.4	Silty, very coarse sand, poorly sorted with abundant rounded pebbles (5 3.3-cm diameter).				3.2 to 3.6	Gray, soft to very soft clay.
			3 to 3.2	Gray, very soft, sandy clay, 1.5-cm sand layer at 1.2 m.				3.6 to 4.6	Gray, silty, fine sand, slightly cohesive.
			3.2 to 3.6	Gray, soft clay; sandy at bottom.				4.6 to 4.7	Clayey sand with granules and pebbles.
27	23.2	3.4	3 to 3.3	Clean, brown-gray, fine to medium sand.	32	19.2	4.6	4.7 to 6.1	Brown-gray, moderately firm clay.
			3.3 to 3.7	Gray, firm, sandy fine sand.				0 to 0.3	Clean, gray, medium to coarse sand.
			3.7 to 3.2	Gray clay.				0.3 to 0.4	Clay.
			3.2 to 3.2	Slightly muddy fine sand.				0.4 to 0.9	Clean, gray, medium to coarse sand, sharp contact at top.
28	18.4	6.1	1.2 to 1.4	Brown-gray fine clay.	33	12.1	2.3	0.9 to 4.6	Brown-gray, moderately firm clay.
			0 to 1.3	Clean, brown-gray, medium to coarse sand.				0 to 2.1	Dark gray, slightly firm mud; increasing silt with depth.
			1.3 to 2.2	Sharp contact: gray, silty fine sand.				2.1 to 2.3	Same as above but firmer; few rounded pebbles (1 2.5-cm diameter) and 5-cm-long elongate shale fragment.
			2.2 to 3.7	Gray, firm, silty clay; sharp contact; wood at ~3.5 m.				24	10.6
3.7 to 6.1	Brown-gray firm clay with many rounded pebbles.	3.1 to 3.6	Gray, slightly silty, fine sand.						
29	12.5	6.1	0 to 3.0	Clean, gray, fine to medium sand.	35	9.5	6.1	3.6 to 6.1	Gray, silty, fine sand becomes more muddy toward bottom with secondary thin sandy layers.
			3.0 to 5.1	Gray, fine sand becomes silty with depth.				0 to 2.7	Clean, gray, moderately well sorted medium sand.
			5.1 to 5.6	Coarse sand with many small pebbles.				2.7 to 2.8	Clay.
			5.6 to 6.1	Gray-brown, moderately firm clay.				2.8 to 2.9	Yellow-brown, clean, medium sand.
30	15.6	3.8	0 to 2.6	Very soft gray mud.	34	10.6	6.1	2.9 to 3.2	Silty, very fine sand.
			2.6 to 2.7	Silty, medium to coarse sand.				3.2 to 3.5	Gray-brown clay.
			2.7 to 3.2	Firm, sandy clay.				3.5 to 3.9	Very fine, silty sand.
			3.2 to 3.7	Moderately firm, slightly sandy clay.				5.9 to 6.1	Clean, light brown, fine sand.
			3.7 to 3.8	Brown-gray, moderately firm clay.					

Table. Sediment descriptions of Lake Erie cores (based on Wentworth classification). --Continued

Core No.	Water depth (m)	Core length (m)	Interval (m)	Description	Core No.	Water depth (m)	Core length (m)	Interval (m)	Description			
36	11.1	6.1	0 to 0.5	Gray, very soft mud; sharp contact at base.	42	15.7	4.5	0 to 0.2	Very fine, sandy soft gray mud.			
			0.5 to 1.5	Firm, gray, sandy clay; sharp contact at base.				0.2 to 0.7	Same as above but more sand.			
			1.5 to 3.2	Gray, firm, slightly sandy clay.				0.7 to 2.2	Same as above but firmer mud.			
			3.2 to 6.1	Gray, firm, slightly sandy clay; shales near bottom.				2.2 to 2.7	Gray, muddy, coarse to very coarse sand, granules, and pebbles.			
37	10.2	6.1	0 to 1.5	Clean, gray fine sand.	43	17.0	5.3	0 to 0.5	Gray, fine sand, very soft mud.			
			1.5 to 6.1	Gray, fine to medium sand interbedded with clay layers 2.5 to 5.0 cm.				0.5 to 1.2	Gray, moderately firm sandy clay.			
38	14.7	3.7	0 to 2.5	Clean, gray, fine to medium sand.				1.2 to 1.3	Coarse and very coarse sand, granules, and pebbles.			
			2.5 to 3.3	Gray, firm clay				1.3 to 3.3	Clean, gray-brown, medium to coarse sand.			
			3.3 to 3.7	Gray, muddy, medium to coarse sand.				3.3 to 3.6	Gray, fine clayey sand; slightly cohesive.			
39	13.0	6.1	0 to 0.6	Clean, gray, very fine to fine sand.				3.6 to 5.5	Gray-brown, firm clay.			
			0.6 to 0.9	Clean, gray, medium to coarse sand.				44	18.0	1.3	0 to 0.9	Mottled silt and clay layers.
			0.9 to 2.4	Clean, gray, fine to medium sand.							0.9 to 1.3	Pebbles and granules on top (lag deposit); moderately stiff, silty mud.
			2.4 to 3.7	Thin (2 to 5.0 cm) layers of clay, sandy clay, and fine to coarse sand, wood fragment at -3.3 m.				45	14.2	3.1	0 to 0.09	Gravelly fine sand (5 2.5-cm diameter).
			3.7 to 4.9	Gray, fine to medium, clayey sand, interbedded with 1.3 cm clay layers.							0.09 to 0.2	Fine sand.
4.9 to 5.8	Gray, firm clay; sandy in places.				0.2 to 3.1	Very fine to fine sand with silt layers.						
40	15.7	4.1	5.8 to 6.1	Clean, gray, coarse and very coarse sand.	46	13.0	4.1	0 to 0.3	Medium sand, moderately well sorted.			
			0 to 0.5	Clean, brown, coarse to very coarse sand with rounded pebbles.				0.3 to 1.3	Sandy silt.			
			0.5 to 0.8	Gray, medium to coarse sand; grading to fine sand at -0.8 m.				1.3	Silty, medium sand.			
			0.8 to 0.9	Brown-gray, medium to coarse sand.				1.3 to 3.9	Moderately firm mud.			
			0.9 to 1.8	Gray, silty, fine sand.				3.9 to 4.1	Silty, very fine sand; 10-cm-diameter rock fragment at -4.0 m.			
41	11.1	4.0	1.8 to 4.1	Gray-brown, moderately firm clay, rounded pebble at -2.0 m.	47	13.0	5.8	0 to 0.4	Medium sand, moderately well sorted.			
			0 to 4.9	Clean, gray, fine to medium sand, grading slightly finer with depth; 2.5-cm layer at -3.4 m.				0.4 to 0.5	Medium to coarse sand.			
								0.5 to 4.8	Silt and silty sand.			
								4.8 to 4.9	Clay and pebbles.			

Table. Sediment descriptions of Lake Erie cores (based on Wentworth classification).--Continued

Core No.	Water depth (m)	Core length (m)	Interval (m)	Description
			4.9 to 5.8	Silt and fine sand.
48	12.6	4.8	0 to 1.6	Fine, medium and coarse sand with thin clay layers.
			1.6 to 1.7	Silt and clay.
			1.7 to 2.1	Fine to medium sand with thin clay layers.
			2.1 to 2.5	Silt and clay, grading down to fine to medium sand.
			2.5 to 2.6	Sandy silt.
			2.6 to 2.7	Fine to medium sand.
			2.7 to 4.6	Mottled silt and clay.
			4.6	Well-sorted, fine sand.
			4.6 to 4.8	Silt and clay.
49	14.2	4.8	0 to 0.7	Muddy sand.
			0.7 to 0.8	Silt grading down to fine to medium sand.
			0.8 to 0.9	Coarse sand and pebbles.
			0.9 to 3.1	Silt and clay.
			3.1 to 3.2	Silty medium sand.
			3.2 to 3.5	Silt and clay.
			3.5 to 3.6	Medium to coarse sand.
			3.6 to 4.8	Silt and clay.

APPENDIX B
SEDIMENT GRAIN-SIZE DATA

Table B-1. RSA Granulometric Data, Lake Erie Cores.

Core No.	Depth (m)	Mean (phi)	Mean (mm)	Median (phi)	Median (mm)	Standard deviation
1	Top	2.5	0.18	2.4	0.19	0.59
	1.5	2.7	0.15	2.7	0.15	0.68
2	Top	1.6	0.33	1.5	0.37	0.61
	0.5	1.5	0.36	1.3	0.40	0.65
	0.9	1.7	0.32	1.4	0.37	0.69
	2.3	2.1	0.23	2.2	0.22	1.03
	3.2	2.4	0.19	2.3	0.20	0.68
3	Top	1.7	0.30	1.3	0.40	0.87
	0.3	1.5	0.40	1.3	0.40	0.62
	0.6	2.9	0.15	2.9	0.13	0.57
	1.4 to 1.9	2.5	0.20	2.7	0.16	1.03
4	2.3	2.7	0.16	2.7	0.16	0.47
	0.8	2.3	0.20	2.3	0.21	0.66
	2.1	2.5	0.18	2.6	0.16	0.94
	3.1	2.4	0.19	2.3	0.20	0.66
	4.0	2.6	0.17	2.6	0.18	0.88
5	Top	2.0	0.25	1.8	0.29	0.78
	0.6	2.4	0.19	2.4	0.19	0.52
	1.5	2.6	0.17	2.5	0.18	0.44
	2.4	2.5	0.17	2.5	0.17	0.45
6	3.0	2.6	0.16	2.6	0.17	0.46
	Top	1.9	0.27	1.8	0.28	0.47
	0.6	1.8	0.30	1.7	0.32	0.46
	1.2	1.9	0.28	1.8	0.30	0.49
	1.9	1.9	0.28	1.8	0.30	0.57
7	1.9	1.9	0.27	1.8	0.28	0.51
	Top	2.1	0.24	2.2	0.22	0.65
	0.6	2.0	0.25	2.1	0.23	0.79
	1.2	2.0	0.26	2.0	0.26	0.47
8	1.5	2.2	0.23	2.2	0.21	1.01
	Top	1.8	0.29	1.9	0.27	0.65
	0.6	1.8	0.29	1.9	0.28	0.63
	1.2	2.0	0.25	1.9	0.27	0.81
	1.9	2.3	0.21	2.3	0.20	0.67
	2.4	2.5	0.17	2.5	0.18	0.43
9	3.3	2.4	0.19	2.5	0.18	0.53
	1.9	2.6	0.16	2.6	0.17	0.56
	2.4	2.2	0.21	2.7	0.15	1.32
10	Top	2.1	0.24	2.1	0.24	0.62
	0.6	2.5	0.18	2.4	0.20	0.54
	1.2	2.3	0.21	2.3	0.20	0.56
	1.9	2.0	0.25	2.1	0.23	1.04
15	Top	2.0	0.26	1.9	0.27	0.51
	0.9	1.9	0.27	1.9	0.27	0.56
	1.9	2.3	0.20	2.3	0.21	0.65

Table B-1. RSA Granulometric Data, Lake Erie Cores.--Continued

Core No.	Depth (m)	Mean		Median		Standard deviation
		(phi)	(mm)	(phi)	(mm)	
16	Top	2.0	0.26	1.9	0.28	0.54
	0.9	1.9	0.27	1.9	0.28	0.42
	1.9	2.0	0.26	1.9	0.28	0.57
	2.4	2.0	0.25	1.8	0.28	0.75
17	Top	1.8	0.28	1.7	0.30	0.51
	0.6	2.0	0.26	1.8	0.29	0.61
	0.9	1.9	0.26	1.8	0.29	0.61
	1.1 to 1.2	2.0	0.25	1.9	0.28	0.64
	2.5	2.0	0.25	1.9	0.26	0.56
	3.1 to 3.2	2.1	0.23	2.0	0.26	0.69
18	3.9	3.0	0.13	2.9	0.13	0.20
	Top	1.9	0.27	1.8	0.29	0.55
	0.5	1.0	0.50	1.3	0.42	0.56
	0.9	1.6	0.32	1.4	0.38	1.08
	1.9	2.2	0.21	2.2	0.22	0.44
	2.7	2.2	0.22	2.1	0.23	0.61
19	3.6	2.2	0.22	2.1	0.23	0.61
	Top	1.61	0.33	1.2	0.42	0.86
	0.3	1.54	0.34	1.3	0.40	0.57
	0.6	1.4	0.38	1.2	0.45	0.84
20	Top	1.9	0.27	1.8	0.28	0.64
	1.2	1.7	0.31	1.2	0.44	1.27
21	Top	1.6	0.32	1.4	0.38	0.57
	0.9	2.4	0.19	2.2	0.21	0.70
22	Top	1.2	0.45	0.9	0.54	0.90
	0.6	1.3	0.40	1.2	0.43	0.76
	0.9	2.2	0.22	2.2	0.22	0.50
	1.4	2.1	0.24	2.1	0.24	0.64
23	Top	2.0	0.25	2.0	0.25	0.56
	0.9	2.0	0.25	2.0	0.26	0.50
	1.9	2.1	0.23	2.1	0.23	0.59
	3.1	3.2	0.11	3.2	0.11	0.56
24	Top	2.4	0.19	2.6	0.17	0.86
	0.6	2.4	0.19	2.6	0.17	1.02
25	0.6	2.1	0.23	2.0	0.24	0.56
	1.2	2.1	0.23	2.1	0.23	0.51
	1.9	2.2	0.22	2.2	0.22	0.58
	2.7	2.0	0.25	2.3	0.21	1.15
27	Top	2.1	0.23	2.0	0.26	0.72
	0.3	1.8	0.28	1.8	0.29	1.04
28	Top	1.3	0.41	1.1	0.47	0.77
	0.6	1.5	0.35	1.2	0.42	0.91
	1.2	2.0	0.25	1.9	0.28	0.85
29	Top	2.3	0.20	2.3	0.20	0.80

Table B-1. RSA Granulometric Data, Lake Erie Cores.--Continued

Core No.	Depth (m)	Mean		Median		Standard deviation
		(phi)	(mm)	(phi)	(mm)	
32	Top	1.5	0.36	1.3	0.40	0.59
	0.2	1.6	0.33	1.5	0.36	0.54
	0.8	1.8	0.28	1.7	0.31	0.58
34	Top	2.2	0.22	2.1	0.24	0.57
	0.6	2.3	0.20	2.3	0.20	0.67
	1.5	2.6	0.17	2.5	0.18	0.55
	3.0	2.6	0.16	2.6	0.17	0.59
35	Top	2.4	0.19	2.3	0.20	0.57
	1.2	2.3	0.20	2.3	0.21	0.59
37	Top	2.4	0.20	2.4	0.19	0.81
	0.3	2.4	0.19	2.4	0.18	0.49
	0.6	2.3	0.20	2.4	0.20	0.53
	1.2	2.5	0.18	2.5	0.18	0.59
	1.9	2.6	0.16	2.6	0.17	0.61
	3.0	2.6	0.17	2.7	0.15	1.03
	4.6	2.0	0.26	2.8	0.15	1.66
38	Top	2.8	0.15	3.2	0.11	1.18
	1.5	2.6	0.16	2.7	0.15	0.73
	3.7	2.0	0.25	2.5	0.18	1.37
39	Top	1.4	0.39	1.2	0.45	0.61
	0.7	3.2	0.11	3.1	0.11	0.09
	2.1	1.3	0.39	1.0	0.49	0.94
	3.0	2.3	0.21	2.3	0.21	0.74
	4.7	2.7	0.15	2.7	0.16	0.50
	6.0	2.5	0.18	2.7	0.15	1.09
40	0.8	1.8	0.28	1.6	0.33	0.75
41	Top	2.4	0.19	2.4	0.19	0.75
	1.2	1.9	0.26	1.8	0.28	0.56
	2.4	2.0	0.25	2.0	0.26	0.53
	3.9	2.3	0.20	2.3	0.21	0.53
42	2.6	2.5	0.18	2.4	0.19	0.53
46	2.6	1.0	0.49	1.0	0.59	0.84
46	Top	2.0	0.25	2.0	0.25	0.52
47	Top	2.0	0.25	2.0	0.25	0.52
	0.2 to 3.0	1.5	0.35	1.5	0.36	0.52
	0.5	1.7	0.32	1.7	0.31	0.51
48	Top	1.3	0.41	1.1	0.47	1.04
	0.9	2.0	0.27	2.0	0.24	0.85
	1.9	2.2	0.22	2.2	0.22	0.83
	1.9	2.2	0.21	2.2	0.22	0.73

Table B-2. Preliminary size distribution data of selected top samples from Lake Erie ICONS cores.

Core No.	Size Distribution (pct)				0.25 to 1.0 pct medium and coarse
	>0.850 (mm)	0.425 to 0.850 (mm)	0.250 to 0.425 (mm)	0.250 (mm)	
1	0.2	0.5	46.0	53.3	46.7
2	0	25.2	44.5	30.3	69.7
3	0	31.3	54.7	14.0	86.0
4	0.1	22.8	48.6	28.5	71.4
5	9.3	3.9	27.7	59.1	40.9
6	0.2	4.9	48.8	46.3	53.9
7	3.6	2.8	7.6	86.0	14.0
8	2.9	51.3	14.5	31.3	68.7
9	Coarse sand and pebbles				
10	7.3	2.1	23.4	67.3	32.8
15	2.2	16.8	44.7	36.3	63.7
16	0.2	28.5	35.9	35.6	64.6
17	7.0	10.0	47.8	35.4	64.8
18	0.1	3.3	47.8	48.0	51.2
19	0.4	46.7	45.6	7.7	92.7
20	2.2	2.6	63.7	31.3	68.7
21	0	2.3	82.9	14.8	85.2
22	36.2	25.4	22.3	16.0	83.9
23	0.1	0.5	24.2	74.7	24.8
24	29.4	2.3	2.3	66.0	34.0
25	71.1	16.4	7.8	4.6	95.3

Table B-3. RSA grain-size data, grab samples.


Sample No.	Depth (m)	Mean		Median		Standard deviation
		(phi)	(mm)	(phi)	(mm)	
1-2	8.0	2.8	0.15	2.7	0.15	0.61
1-3	7.0	2.3	0.21	2.4	0.20	0.50
1-4	8.5	2.3	0.21	2.4	0.19	0.71
2-1	4.0	2.9	0.13	3.0	0.13	0.50
2-2	7.3	2.3	0.20	2.3	0.20	0.42
2-3	8.5	2.5	0.18	2.5	0.18	0.50
2-4	9.1	2.4	0.20	2.4	0.19	0.50
3-1	2.4	2.5	0.17	2.5	0.17	0.48
3-2	8.5	Too coarse for RSA analysis, see sieve sheet				
3-3	9.1	2.5	0.18	2.4	0.17	0.72
3-4	12.8	2.7	0.16	2.6	0.16	0.52
4-1	3.0	2.3	0.20	2.3	0.20	0.60
4-2	9.1	2.0	0.26	2.0	0.25	0.48
4-3	9.1	1.6	0.34	1.4	0.39	0.69
4-4	13.7	1.5	0.37	1.2	0.44	0.92
5-1	0.9	Too coarse for RSA analysis, see sieve sheet				
5-2	3.0	Predominantly mud, too fine for RSA analysis				
5-3	7.3	2.1	0.23	2.0	0.25	0.88
5-4	9.8	1.9	0.28	1.7	0.30	0.69
5-5	15.2	Predominantly mud, too fine for RSA analysis				
6-1	1.2	1.9	0.26	2.0	0.26	0.63
6-2	12.1	Predominantly mud, too fine for RSA analysis				
6-3	15.2	Predominantly mud, too fine for RSA analysis				
7-1	7.9	Predominantly mud, too fine for RSA analysis				
7-2	2.1	Predominantly mud, too fine for RSA analysis				
7A-1	4.0	2.0	0.25	1.9	0.26	0.72
7A-2	13.4	Predominantly mud, too fine for RSA analysis				

APPENDIX C
RSA SIZE ANALYSIS

•

SIZE ANALYSIS


Millimeters

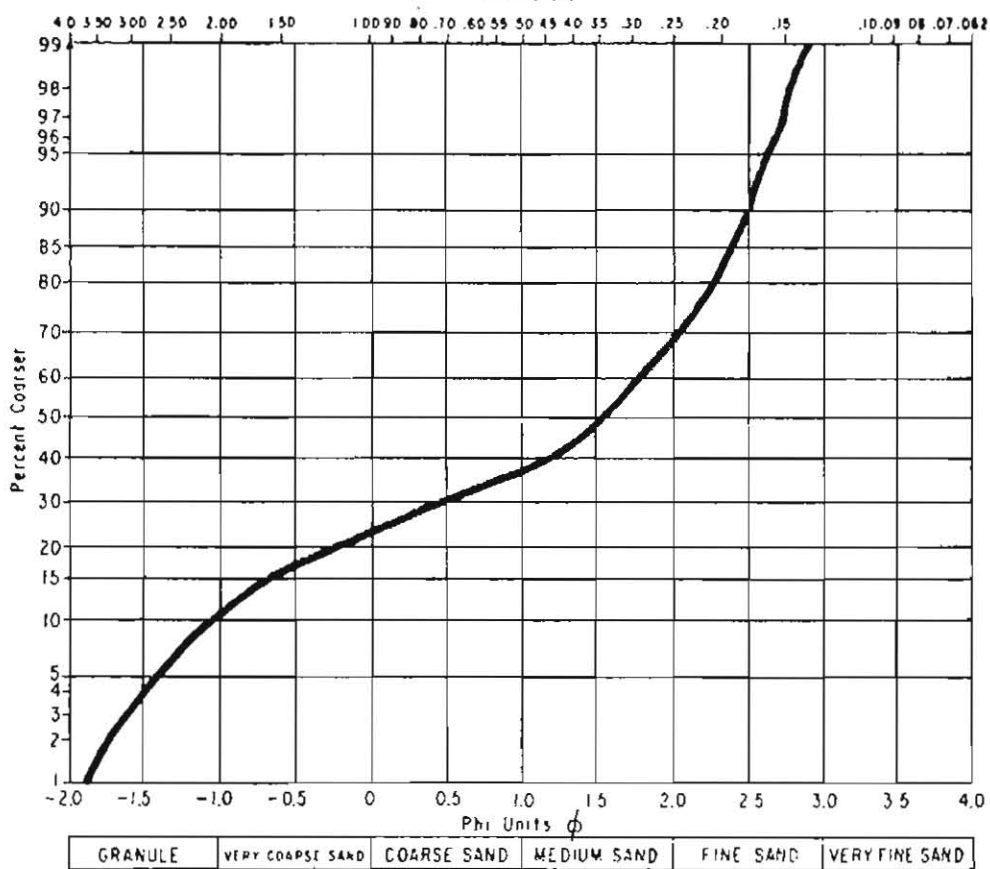

Presque Isle grab sample 5-1


SIZE ANALYSIS

Millimeters

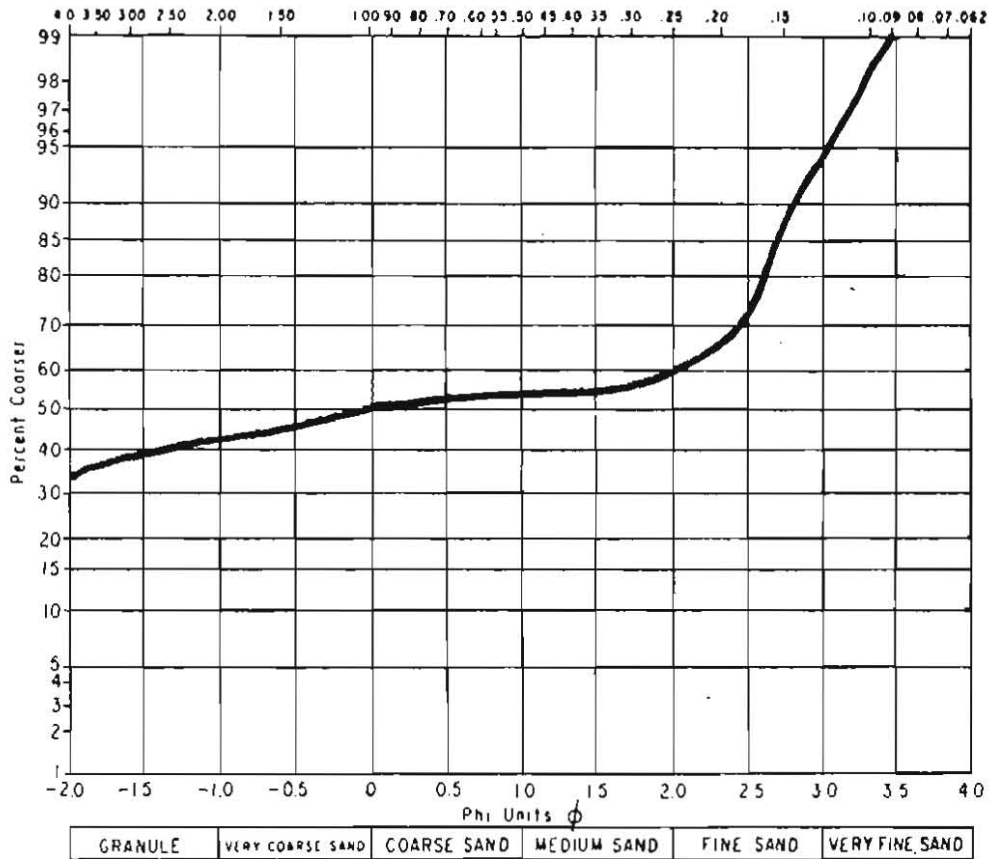

Presque Isle grab sample 3-2

SIZE ANALYSIS

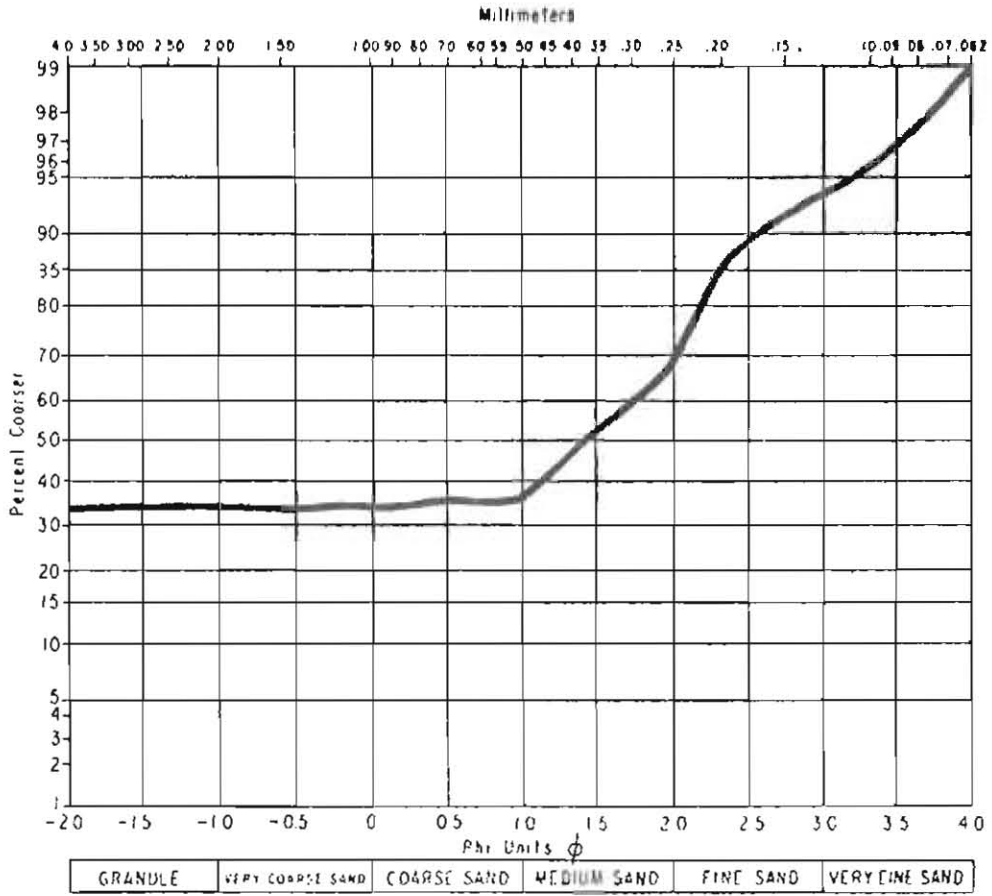


Core 4, (top)

$$M_d = 1.6 \text{ phi}$$

$$0.33 \text{ mm}$$


SIZE ANALYSIS

Millimeters

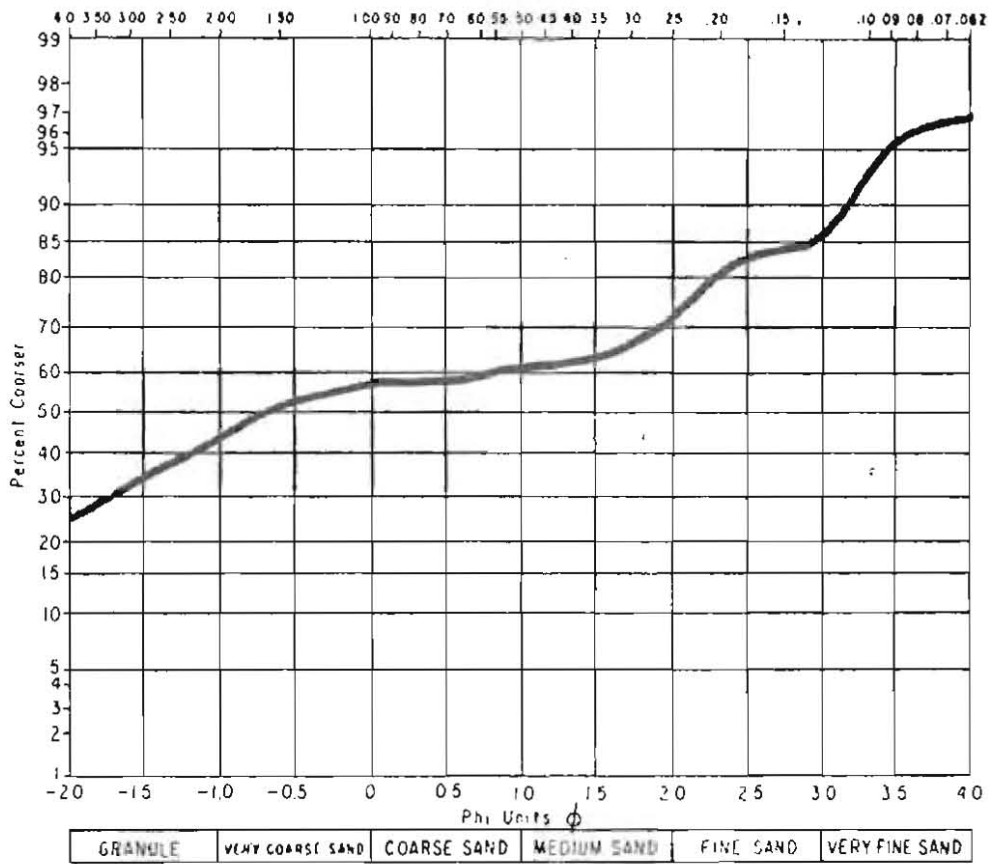


Core 7, -1.6 m

$M_d = -0.75 \text{ phi}$
1.68 mm

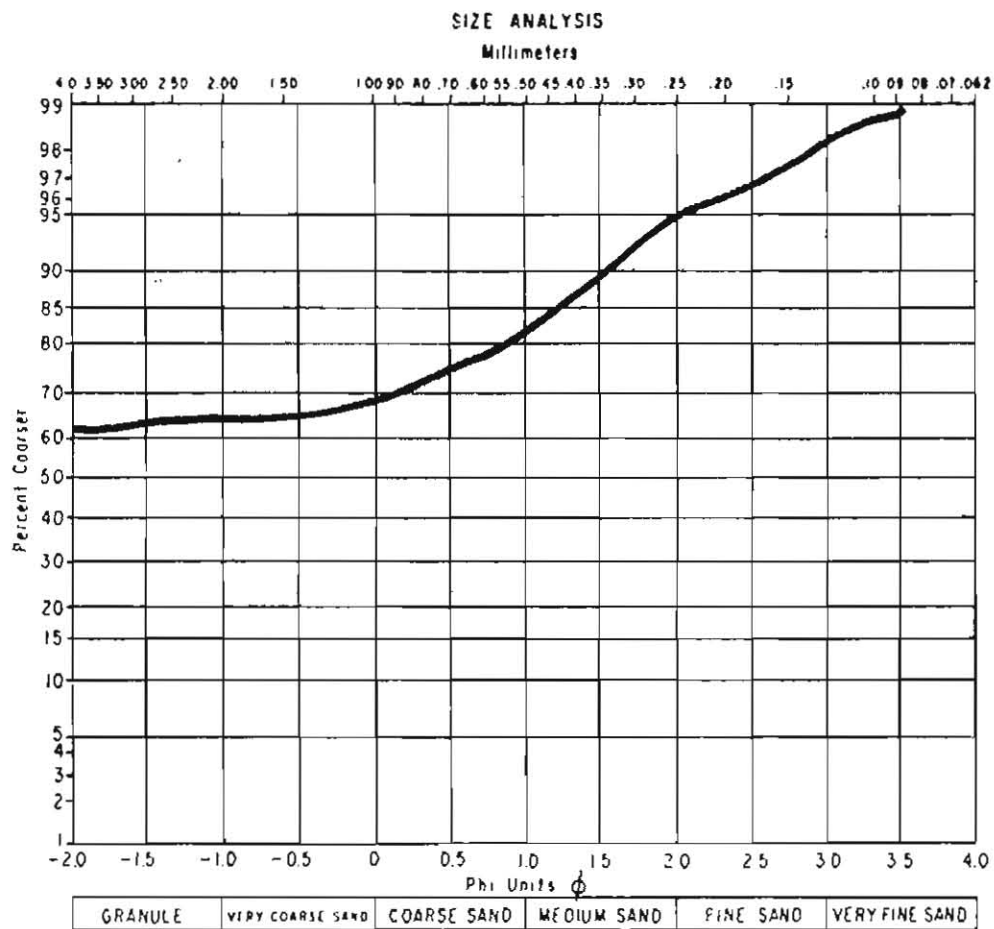

Core 8, 0.8 to 1.1 m


SIZE ANALYSIS

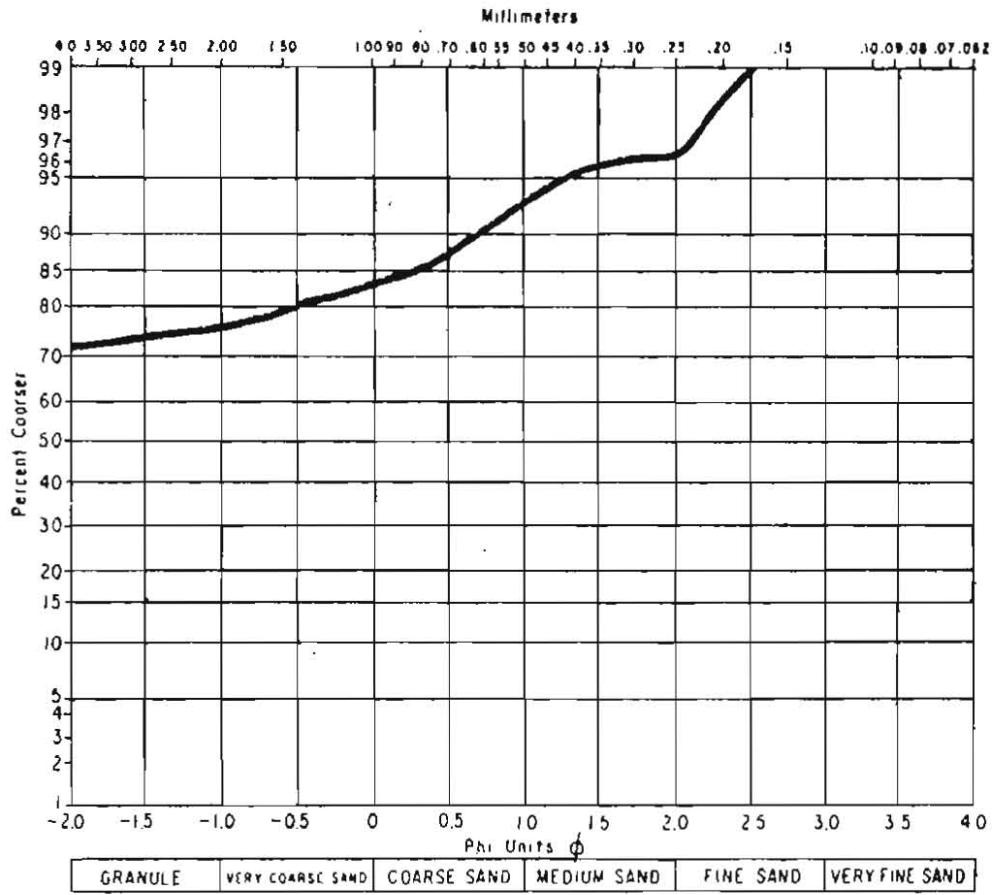

Core 9, (top)


SIZE ANALYSIS

Millimeters

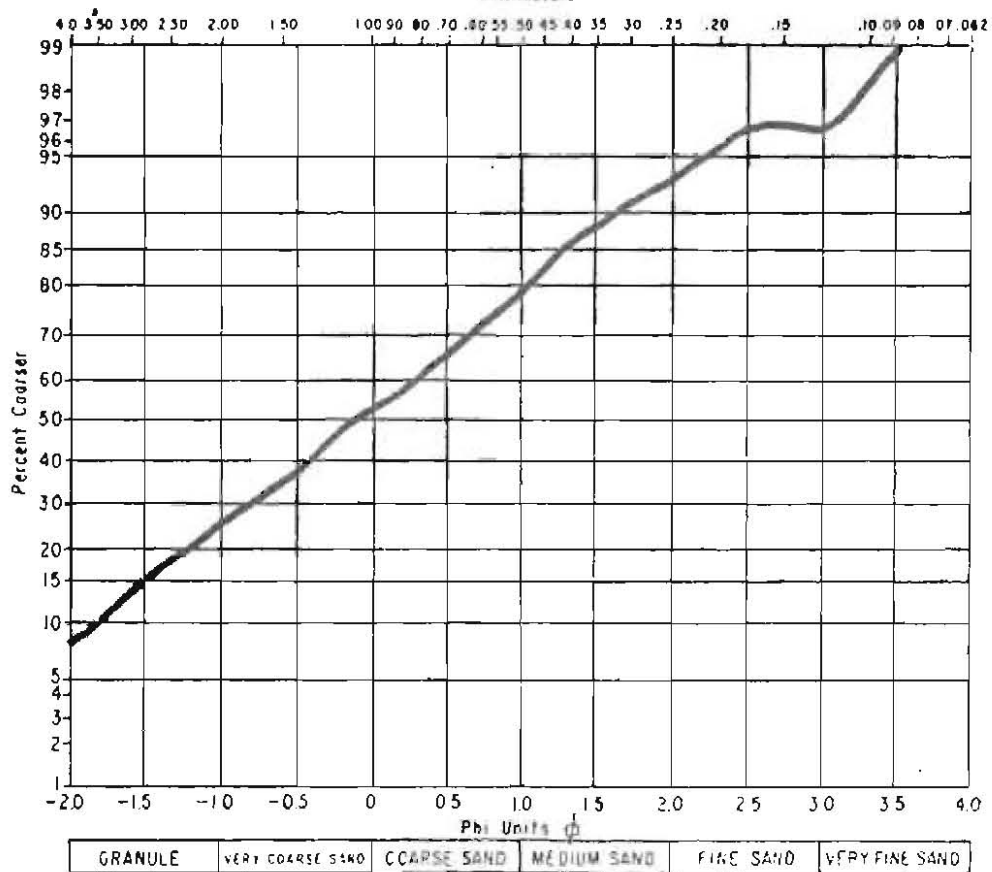


Core 9, -0.3 m
(excludes one pebble @ 3/4 sieve)

$M_d = 0.1 \text{ phi}$
1.07 mm

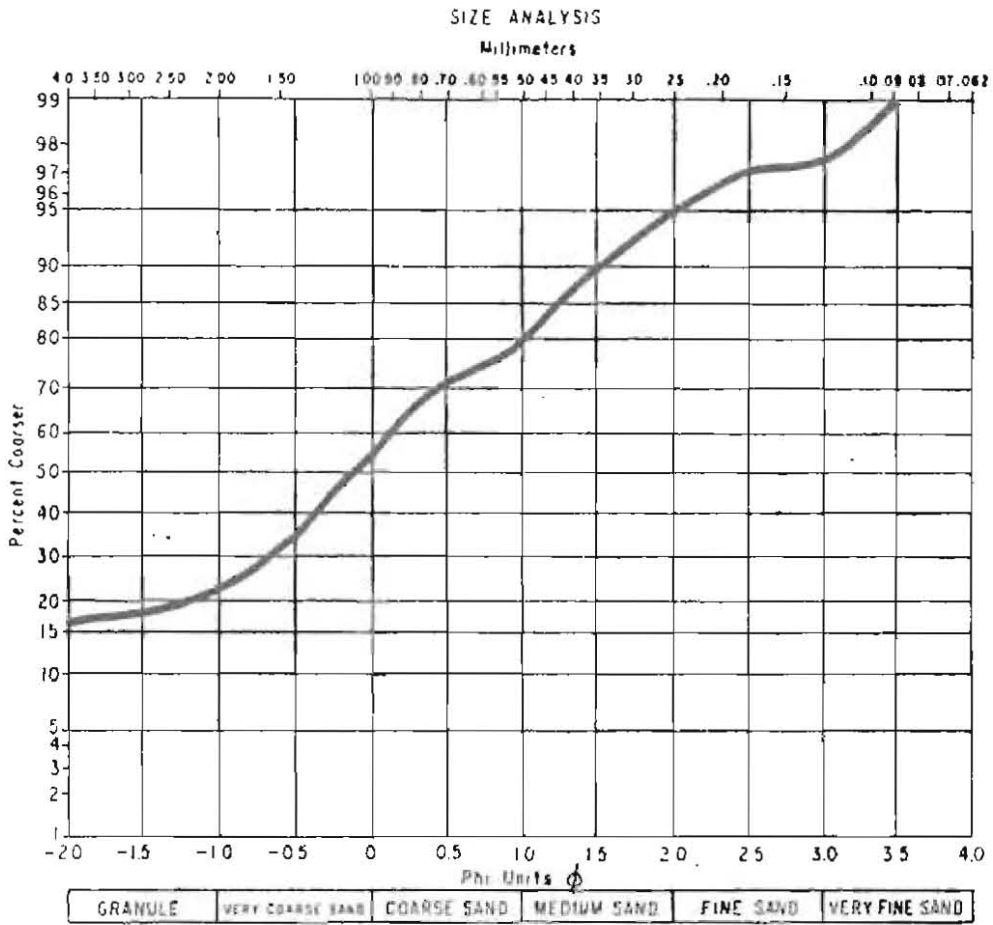


Core 9, -0.6 m

$M_d = -0.1 \text{ phi}$
1.07 mm

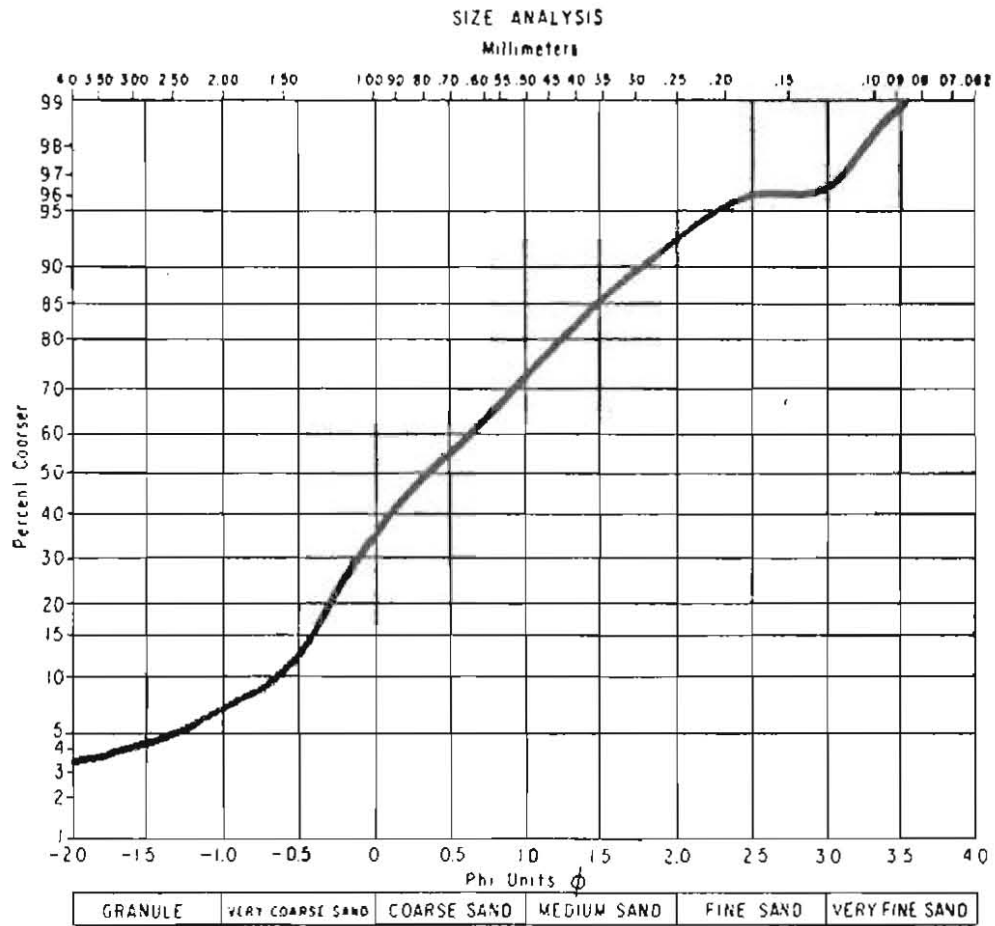

Core 9, -0.9 m
(includes pebble @ 7/16 sieve)


$M_d = 0.4 \text{ phi}$
0.76 mm

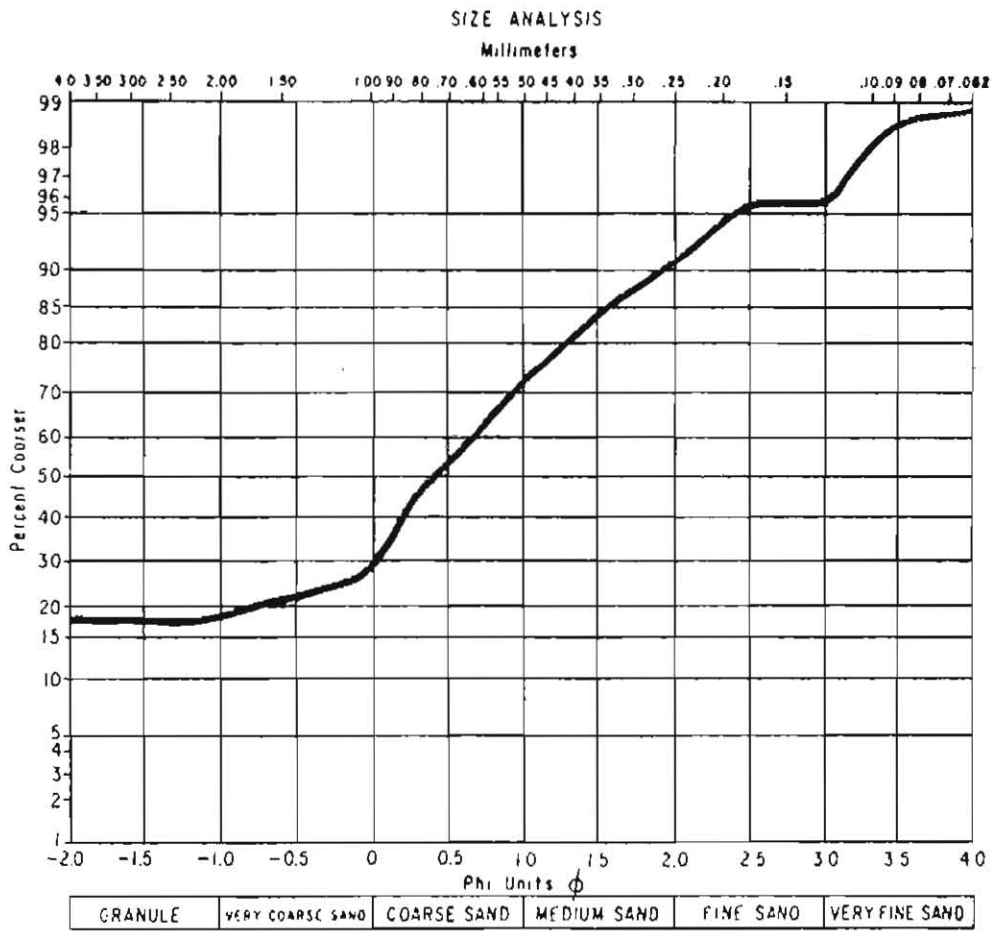

Core 9, -1.4 m

$M_d = 0.4 \text{ phi}$
 0.76 mm

SIZE ANALYSIS

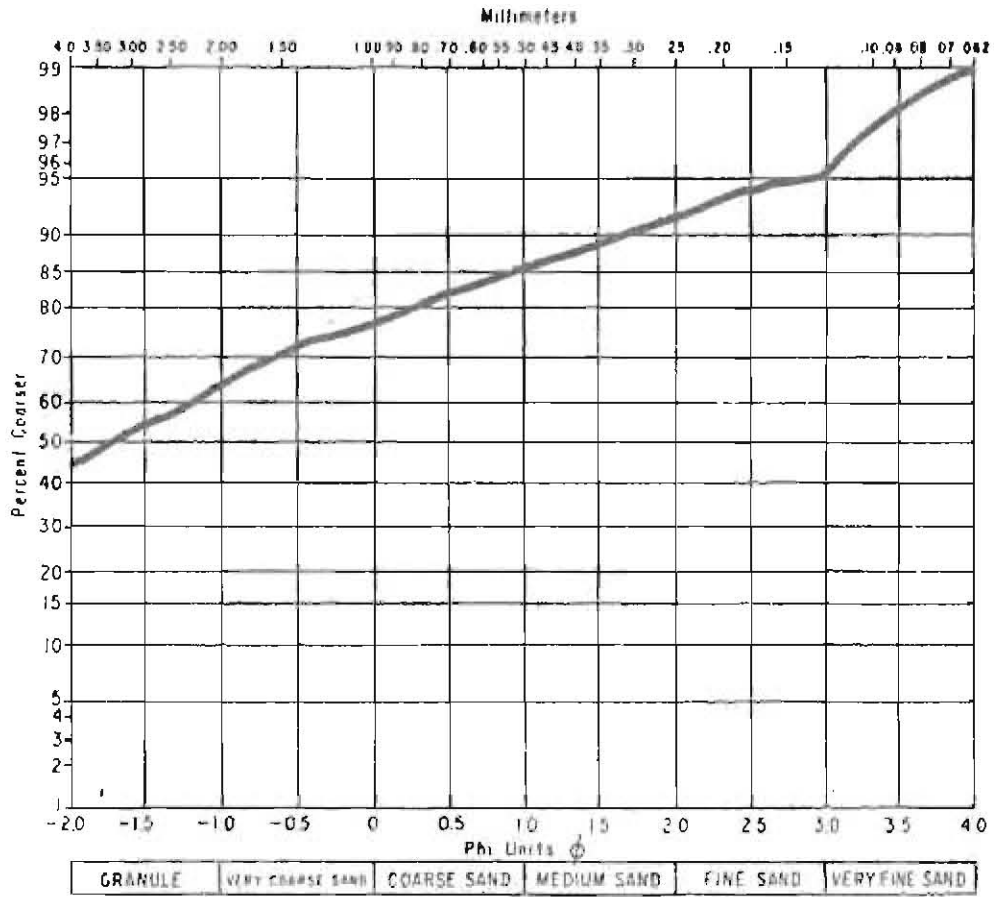


Core 12, -0.2 m

$$M_d = -1.75 \text{ phi}$$

$$3.36 \text{ mm}$$


SIZE ANALYSIS

Millimeters

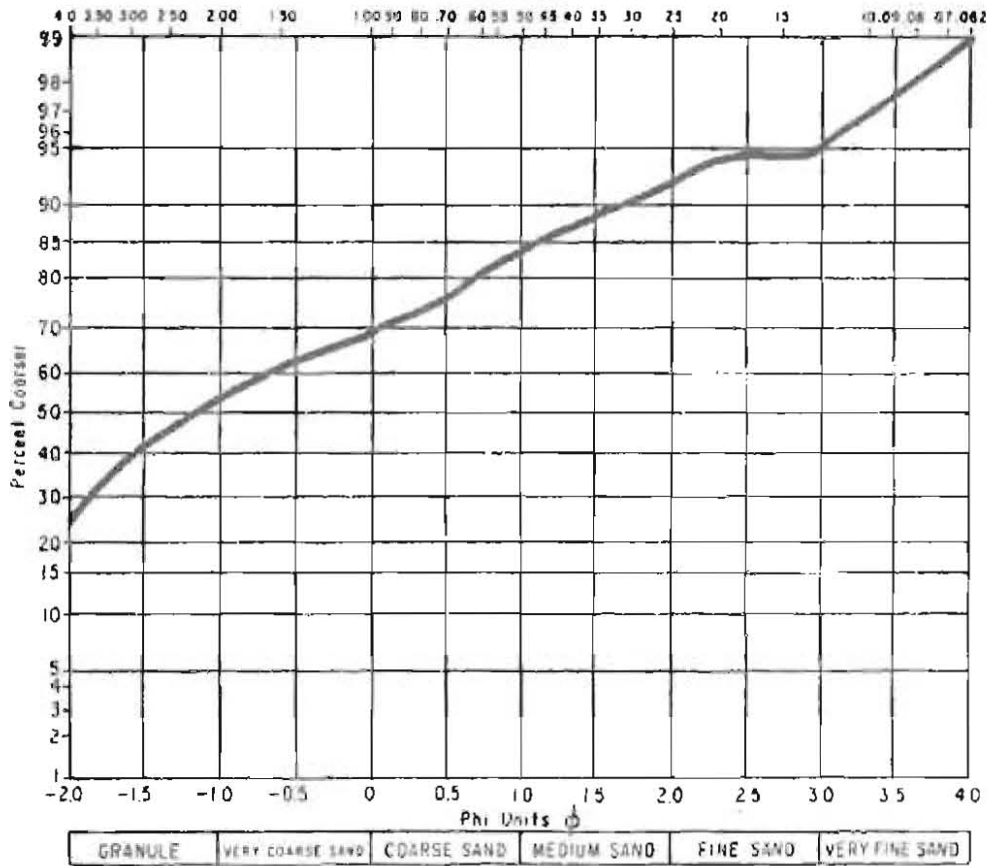


Core 12, -0.4 m

$M_d = -1.2 \text{ phi}$
2.30 mm

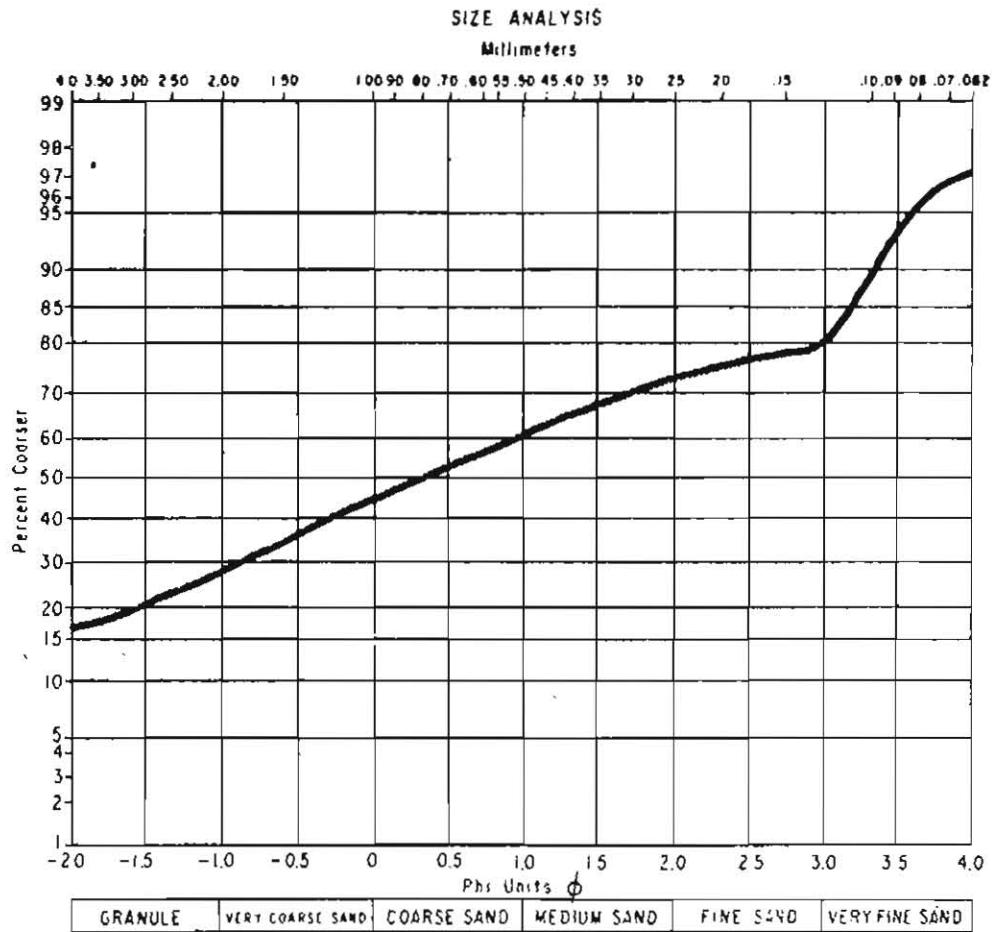


Core 12, -0.7
(exclude one pebble @ 7/8 sieve)

$M_d = 0.3 \text{ phi}$
0.81 mm

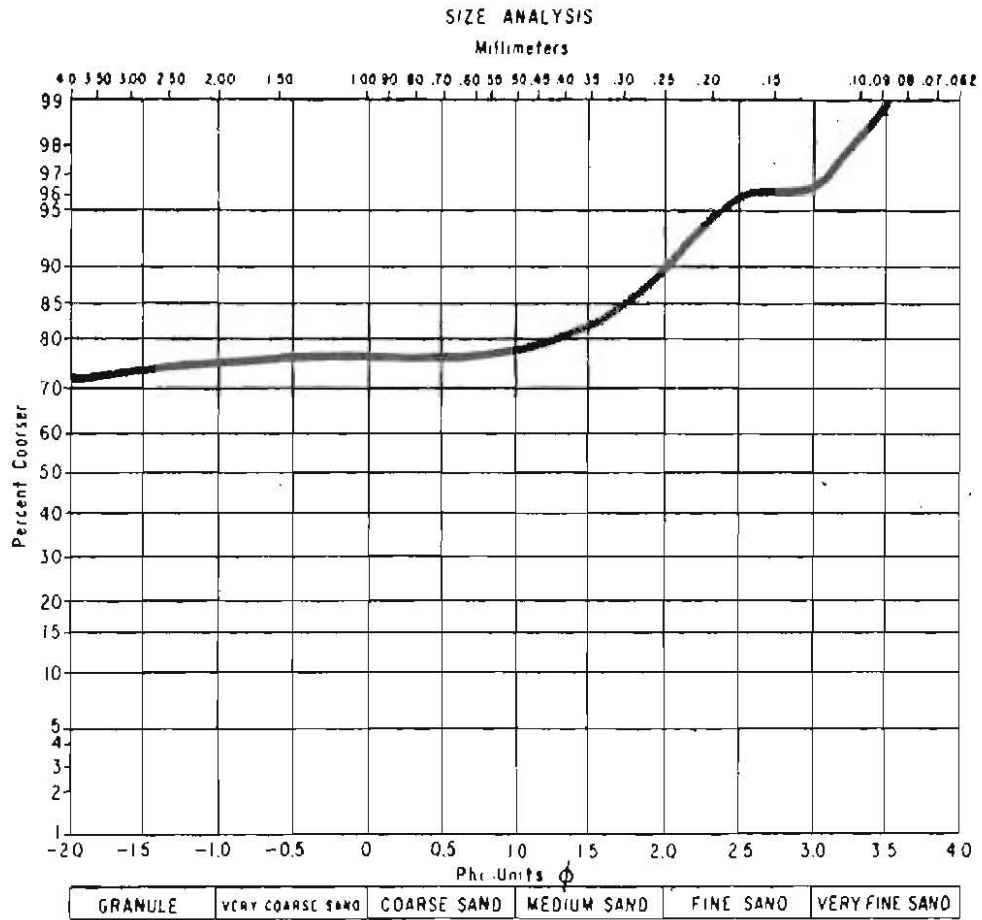

Core 21, -1.3 m


SIZE ANALYSIS

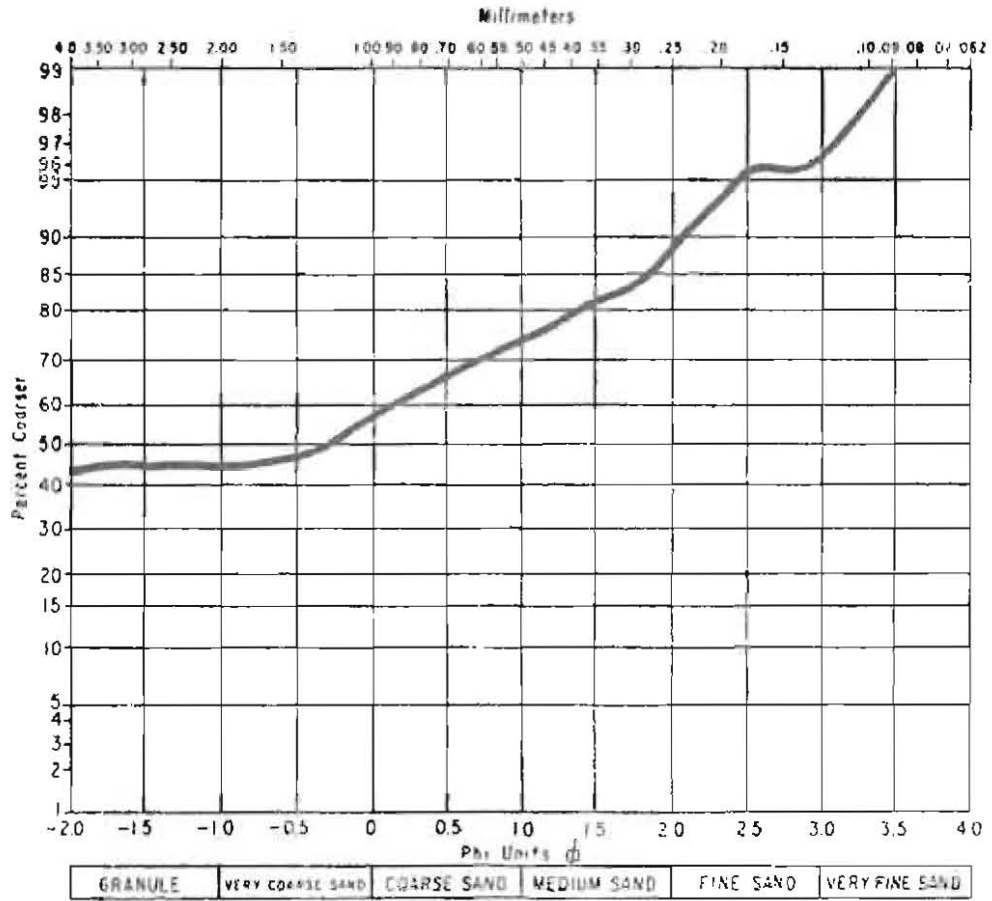

Core 23, -0.2 m

$M_d = -0.24 \text{ phi}$
1.18 mm


SIZE ANALYSIS

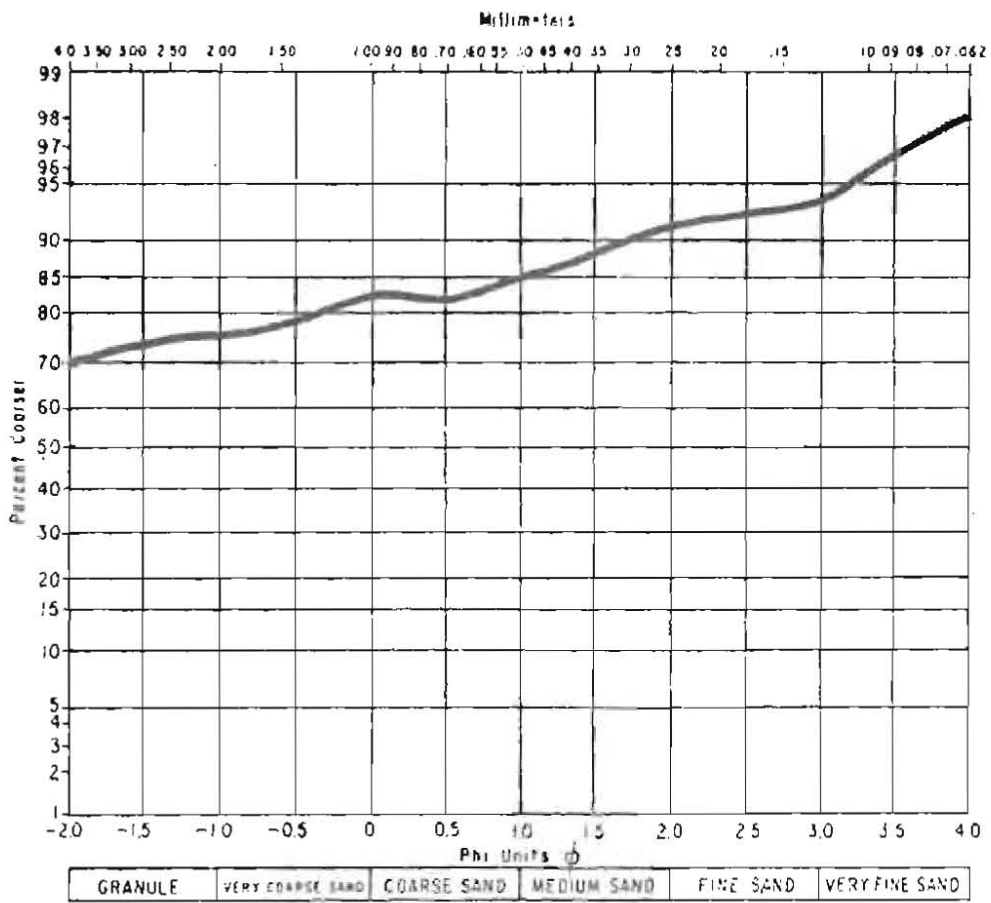

Core 25, -3.4 m


SIZE ANALYSIS

Millimeters

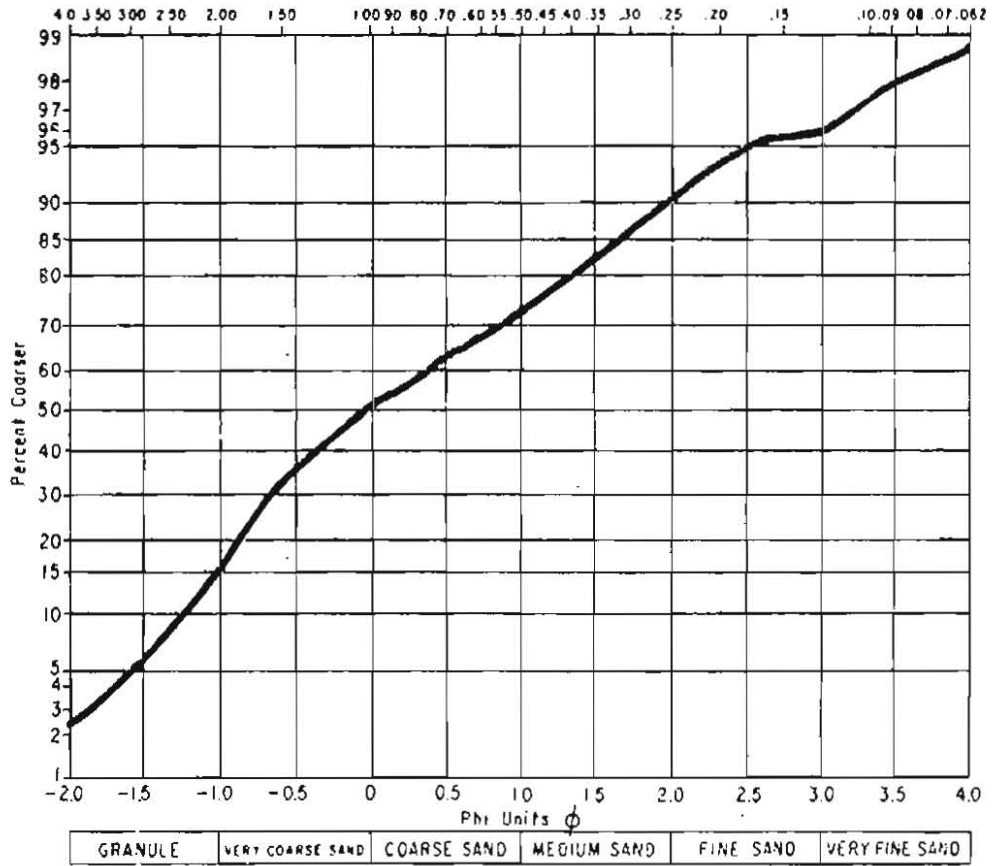

Core 39, -6.1 m


$M_d = -0.1 \text{ phi}$
1.07 mm

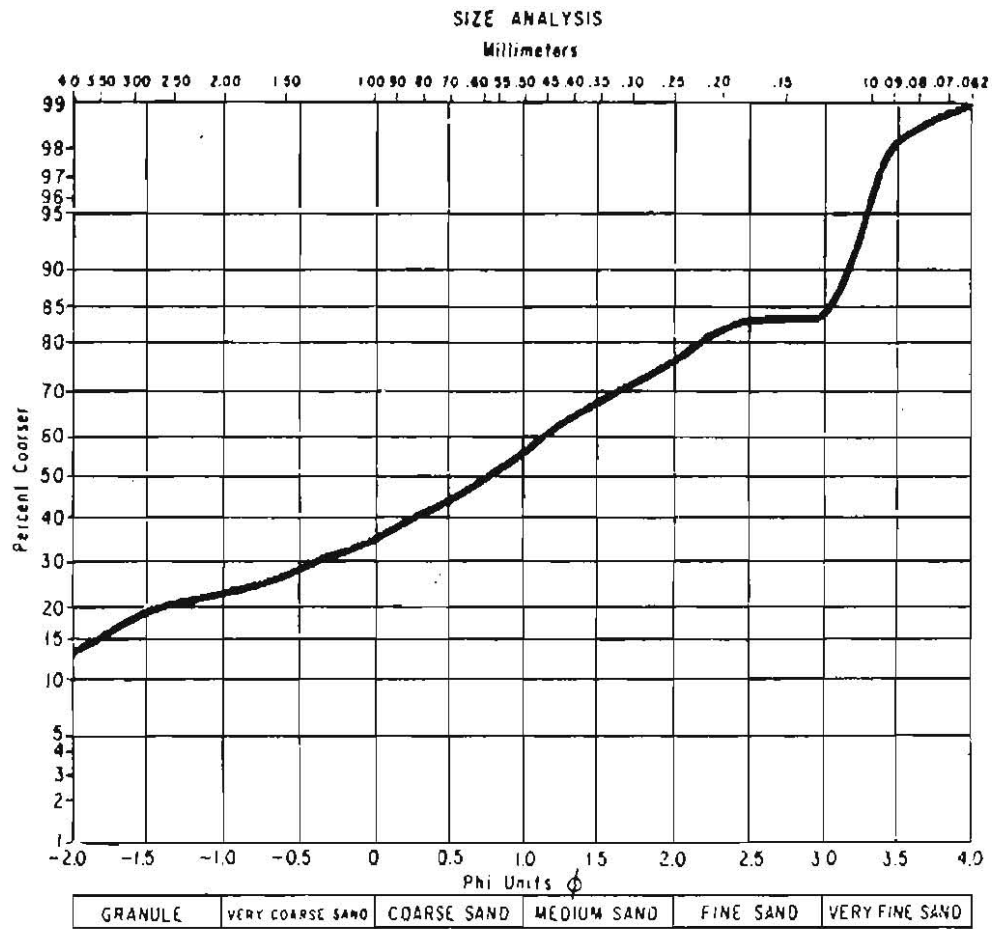

Core 40 (top)

$M_d = 0.8 \text{ phi}$
 0.57 mm


SIZE ANALYSIS

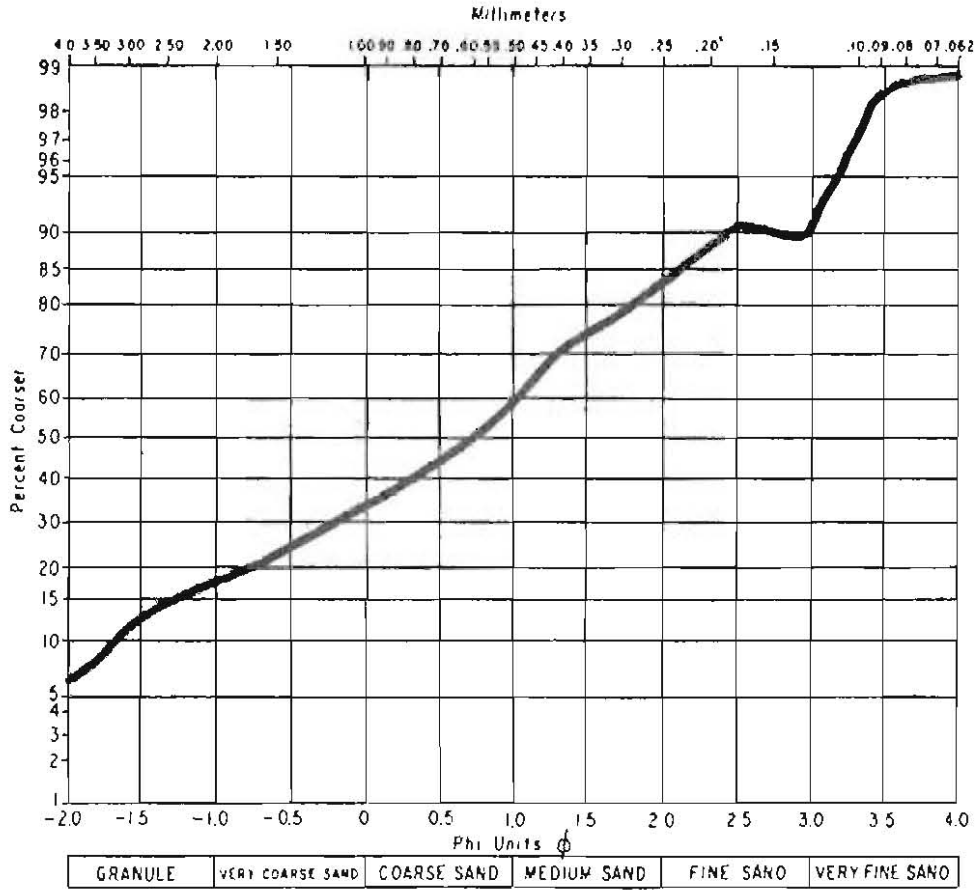

Core 40, -0.3 m

$N_d = 0.8 \text{ phi}$
 0.57 mm


SIZE ANALYSIS

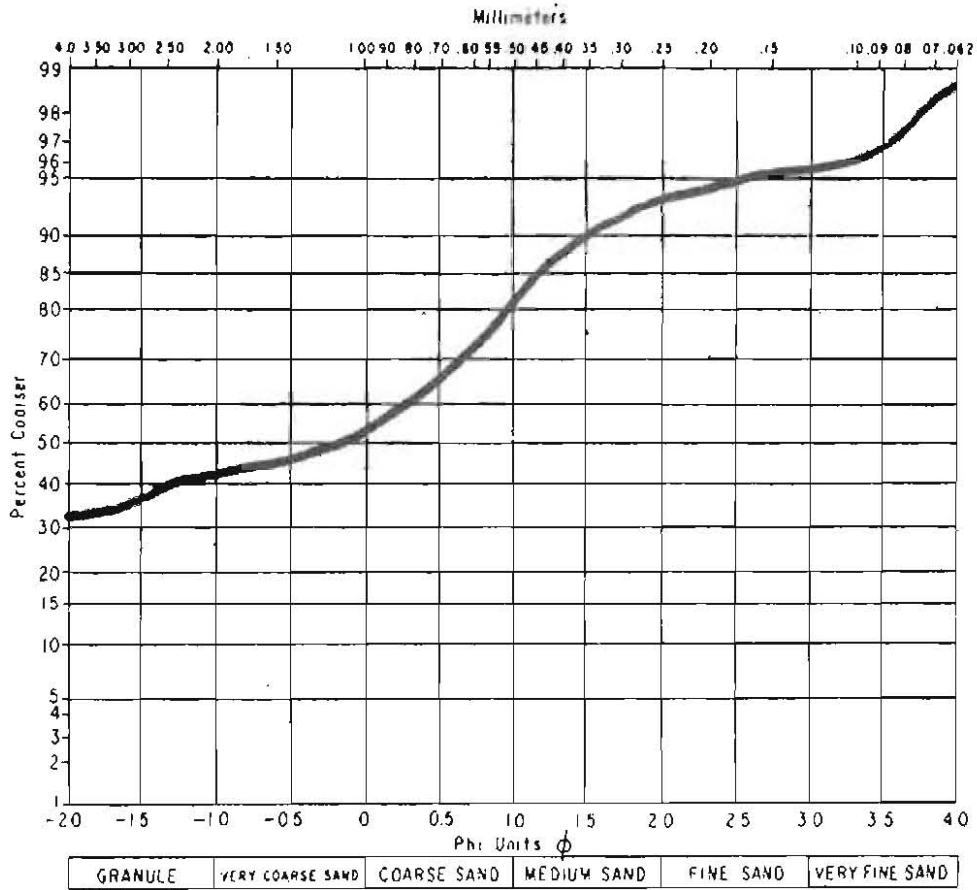

Core 43, -1.2 m

$M_d = 0.75 \text{ phi}$
0.60 mm

SIZE ANALYSIS

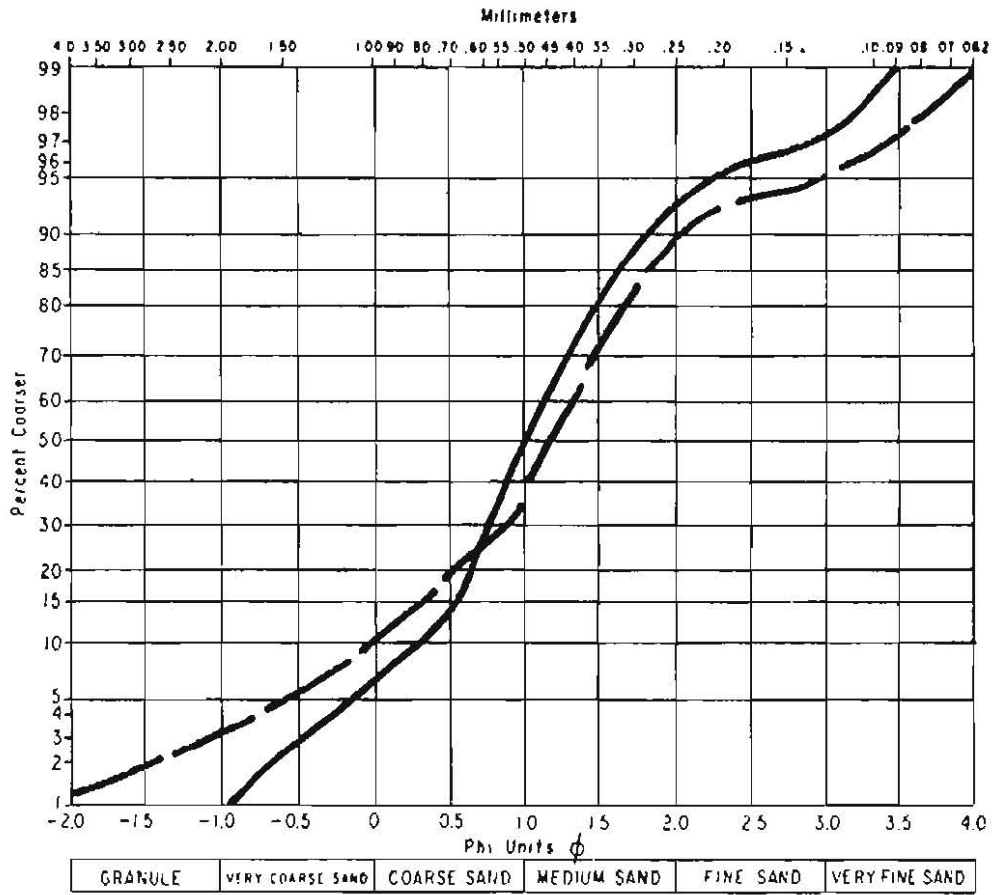

-- Core 43, -1.6 m

$M_d = 1.2 \text{ phi}$
0.44 mm

- Core 43, -3.0 m

$M_d = 1.15 \text{ phi}$
0.45 mm

Williams, S. Jeffress

Geological character and mineral resources of south central Lake Erie / by S. Jeffress Williams and Edward P. Meisburger--Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Springfield, Va. : available from NTIS, 1982.

[62] p. : ill. ; 28 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 82-9)

Cover title.

"October 1982."

Report provides seismic reflection and sediment core data on the geomorphology, geologic character, and sediment distribution for a part of Lake Erie. Emphasis is on locating, describing, and delineating offshore sand deposits for potential use as fill material for beach nourishment on Presque Isle Peninsula, Erie, Pennsylvania.

1. Beach nourishment. 2. Lake Erie. 3. Presque Isle. I. Title. II. Meisburger, Edward P. III. Coastal Engineering Research Center (U.S.). IV. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 82-9.

TC203

.U581nr

no. 82-9

627

Williams, S. Jeffress

Geological character and mineral resources of south central Lake Erie / by S. Jeffress Williams and Edward P. Meisburger--Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Springfield, Va. : available from NTIS, 1982.

[62] p. : ill. ; 28 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 82-9)

Cover title.

"October 1982."

Report provides seismic reflection and sediment core data on the geomorphology, geologic character, and sediment distribution for a part of Lake Erie. Emphasis is on locating, describing, and delineating offshore sand deposits for potential use as fill material for beach nourishment on Presque Isle Peninsula, Erie, Pennsylvania.

1. Beach nourishment. 2. Lake Erie. 3. Presque Isle. I. Title. II. Meisburger, Edward P. III. Coastal Engineering Research Center (U.S.). IV. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 82-9.

TC203

.U581nr

no. 82-9

627

Williams, S. Jeffress

Geological character and mineral resources of south central Lake Erie / by S. Jeffress Williams and Edward P. Meisburger--Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Springfield, Va. : available from NTIS, 1982.

[62] p. : ill. ; 28 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 82-9)

Cover title.

"October 1982."

Report provides seismic reflection and sediment core data on the geomorphology, geologic character, and sediment distribution for a part of Lake Erie. Emphasis is on locating, describing, and delineating offshore sand deposits for potential use as fill material for beach nourishment on Presque Isle Peninsula, Erie, Pennsylvania.

1. Beach nourishment. 2. Lake Erie. 3. Presque Isle. I. Title. II. Meisburger, Edward P. III. Coastal Engineering Research Center (U.S.). IV. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 82-9.

TC203

.U581nr

no. 82-9

627

Williams, S. Jeffress

Geological character and mineral resources of south central Lake Erie / by S. Jeffress Williams and Edward P. Meisburger--Fort Belvoir, Va. : U.S. Army, Corps of Engineers, Coastal Engineering Research Center, Springfield, Va. : available from NTIS, 1982.

[62] p. : ill. ; 28 cm.--(Miscellaneous report / Coastal Engineering Research Center ; no. 82-9)

Cover title.

"October 1982."

Report provides seismic reflection and sediment core data on the geomorphology, geologic character, and sediment distribution for a part of Lake Erie. Emphasis is on locating, describing, and delineating offshore sand deposits for potential use as fill material for beach nourishment on Presque Isle Peninsula, Erie, Pennsylvania.

1. Beach nourishment. 2. Lake Erie. 3. Presque Isle. I. Title. II. Meisburger, Edward P. III. Coastal Engineering Research Center (U.S.). IV. Series: Miscellaneous report (Coastal Engineering Research Center (U.S.)); no. 82-9.

TC203

.U581nr

no. 82-9

627